

6. GROUNDWATER PROGRAMS

6.1 SUMMARY

Groundwater monitoring at DOE PORTS is required by a combination of state and federal regulations, legal agreements with the Ohio EPA and U.S. EPA, and DOE Orders. More than 400 monitoring wells are used to track the flow of groundwater and to identify and measure groundwater contaminants. Groundwater programs also include on-site surface water monitoring and water supply monitoring.

Concentrations of trichloroethene are decreasing and the groundwater plumes are shrinking in both monitoring areas in Quadrant I (the X-749/X-120/PK Landfill area and the Quadrant I Groundwater Investigative Area). Although trichloroethene is still detected in one off-site monitoring well associated with the X-749/X-120/PK Landfill groundwater plume, concentrations of trichloroethene in this off-site well have decreased to less than 1 µg/L from concentrations up to 4 µg/L in 2006. Trichloroethene has not been detected in groundwater beyond the DOE property boundary at concentrations that exceed the EPA drinking water standard of 5 µg/L.

In 2009, a special investigation was conducted in the Quadrant II Groundwater Investigative Area that identified areas of groundwater in the southeastern portion of the plume with higher concentrations of trichloroethene than previously known. The western perimeter of the plume in the Quadrant II Groundwater Investigative Area is also further west than previously identified. The other areas of contaminated groundwater present at PORTS did not change significantly in 2009.

The *2009 Groundwater Monitoring Report for the Portsmouth Gaseous Diffusion Plant* provides further details on the groundwater plumes at PORTS, specific monitoring well identifications, and analytical results for monitoring wells. This document and other documents referenced in this chapter are available in the PORTS Environmental Information Center.

6.2 INTRODUCTION

This chapter provides an overview of groundwater monitoring at PORTS and the results of the groundwater monitoring program for 2009. The following sections provide an overview of the DOE PORTS groundwater monitoring program followed by a review of the history and 2009 monitoring data for each area. Chapter 3, Section 3.2 provides additional information about the remedial actions implemented at a number of the areas discussed in this chapter to reduce or eliminate groundwater contamination.

This chapter also includes information on the groundwater treatment facilities at PORTS. These facilities receive contaminated groundwater from the groundwater monitoring areas and treat the water prior to discharge through the permitted LPP NPDES outfalls.

6.3 OVERVIEW OF GROUNDWATER MONITORING AT DOE PORTS

This section provides an overview of the regulatory basis for groundwater monitoring at PORTS, groundwater use and geology, and monitoring activities and issues.

6.3.1 Regulatory Programs

Groundwater monitoring at PORTS was initiated in the 1980s. Groundwater monitoring has been conducted in response to state and/or federal regulations, regulatory documents prepared by DOE PORTS, agreements between the DOE and Ohio EPA or U.S. EPA, and DOE Orders.

Because of the numerous regulatory programs applicable to groundwater monitoring at PORTS, an *Integrated Groundwater Monitoring Plan* was developed to address all groundwater monitoring requirements for PORTS. The initial plan, dated November 1998, was reviewed and approved by the Ohio EPA and implemented at PORTS starting on April 1, 1999. The *Integrated Groundwater Monitoring Plan* is periodically revised by DOE and approved by the Ohio EPA. An annual groundwater report is submitted to Ohio EPA in accordance with the *Integrated Groundwater Monitoring Plan*.

Groundwater monitoring in January through June of 2009 was completed in accordance with the *Integrated Groundwater Monitoring Plan* dated August 2007. A revised *Integrated Groundwater Monitoring Plan* was implemented beginning in July of 2009. Revisions included changes in monitoring parameters and/or sampling frequencies for wells in the X-701B Holding Pond area, X-616 Chromium Sludge Surface Impoundments, and X-734 Landfills. The monitoring program for the X-749/X-120/PK Landfill was also revised based on the results of special studies conducted in the area. Wells that monitor the X-740 Waste Oil Handling Facility and the northwestern portion of the X-701B Holding Pond area were also removed from the IGWMP based on remedial actions planned or taking place in these areas.

Groundwater monitoring is also conducted to meet DOE Order requirements. Exit pathway monitoring assesses the effect of PORTS on off-site groundwater quality. DOE Orders are the basis for radiological monitoring of groundwater at PORTS.

6.3.2 Groundwater Use and Geology

Two water-bearing zones are present beneath PORTS: the Gallia and Berea formations. The Gallia is the uppermost water-bearing zone and contains most of the groundwater contamination at PORTS. The Berea is deeper than the Gallia and is usually separated from the Gallia by the Sunbury shale, which acts as a barrier to impede groundwater flow between the Gallia and Berea formations. Additional information about site hydrogeology is available in the PORTS Environmental Information Center.

Groundwater directly beneath PORTS is not used as a domestic, municipal, or industrial water supply, and contaminants in the groundwater beneath PORTS do not affect the quality of the water in the Scioto River Valley buried aquifer. PORTS is the largest industrial user of water in the vicinity and obtains water from three water supply well fields south of Piketon in the Scioto River Valley buried aquifer. The DOE has filed a deed notification at the Pike County Auditor's Office that restricts the use of groundwater beneath the PORTS site.

6.3.3. Monitoring Activities

Groundwater monitoring at PORTS includes several activities. Samples of water are collected from groundwater monitoring wells and analyzed to obtain information about contaminants and naturally-occurring compounds in the groundwater. Monitoring wells are also used to obtain other information about groundwater. When the level of water, or groundwater elevation, is measured in a number of wells over a short period of time, the groundwater elevations, combined with information about the subsurface soil, can be used to estimate the rate and direction of groundwater flow. The rate and direction of groundwater flow can be used to predict the movement of contaminants in the groundwater and to develop ways to control or remediate groundwater contamination.

6.4 GROUNDWATER MONITORING AREAS

The *Integrated Groundwater Monitoring Plan* requires groundwater monitoring of 11 areas within the quadrants of the site designated by the RCRA Corrective Action Program. These areas (see Figure 6.1) are:

- Quadrant I
 - X-749/X-120/PK Landfill,
 - Quadrant I Groundwater Investigative Area/X-749A Classified Materials Disposal Facility,
- Quadrant II
 - Quadrant II Groundwater Investigative Area,
 - X-701B Holding Pond,
 - X-633 Pumphouse/Cooling Towers Area,
- Quadrant III
 - X-616 Chromium Sludge Surface Impoundments,
 - X-740 Waste Oil Handling Facility,
- Quadrant IV
 - X-611A Former Lime Sludge Lagoons,
 - X-735 Landfills,
 - X-734 Landfills, and
 - X-533 Switchyard Area.

The *Integrated Groundwater Monitoring Plan* also contains requirements for (1) surface water monitoring in creeks and drainage ditches at PORTS that receive groundwater discharge, and (2) water supply monitoring.

In general, samples are collected from wells (or surface water locations) at each area listed above and are analyzed for metals, volatile organic compounds, and/or radionuclides. Table 6.1 lists the analytical requirements for each groundwater monitoring area and other monitoring programs described in this chapter. DOE PORTS then compares constituents detected in the groundwater to standards called preliminary remediation goals to assess the potential for each constituent to affect human health and the environment.

Five areas of groundwater contamination, commonly called groundwater plumes, have been identified at PORTS. Groundwater contamination consists of volatile organic compounds (primarily trichloroethene) and radionuclides such as technetium-99. The areas that contain groundwater plumes are X-749/X-120/PK Landfill, Quadrant I Groundwater Investigative Area/X-749A Classified Materials Disposal Facility, Quadrant II Groundwater Investigative Area, X-701B Holding Pond, and X-740 Waste Oil Handling Facility. Other areas are monitored to evaluate areas of groundwater contaminated with metals, to ensure past uses of the area (such as a landfill) have not caused groundwater contamination, or to monitor remediation that has taken place in the area.

The following sections describe the history of each groundwater monitoring area and groundwater monitoring results for each area in 2009.

6.4.1 X-749 Contaminated Materials Disposal Facility/X-120 Old Training Facility/PK Landfill

In the southernmost portion of PORTS in Quadrant I, groundwater concerns focus on three contaminant sources: X-749 Contaminated Materials Disposal Facility, X-120 Old Training Facility, and PK Landfill.

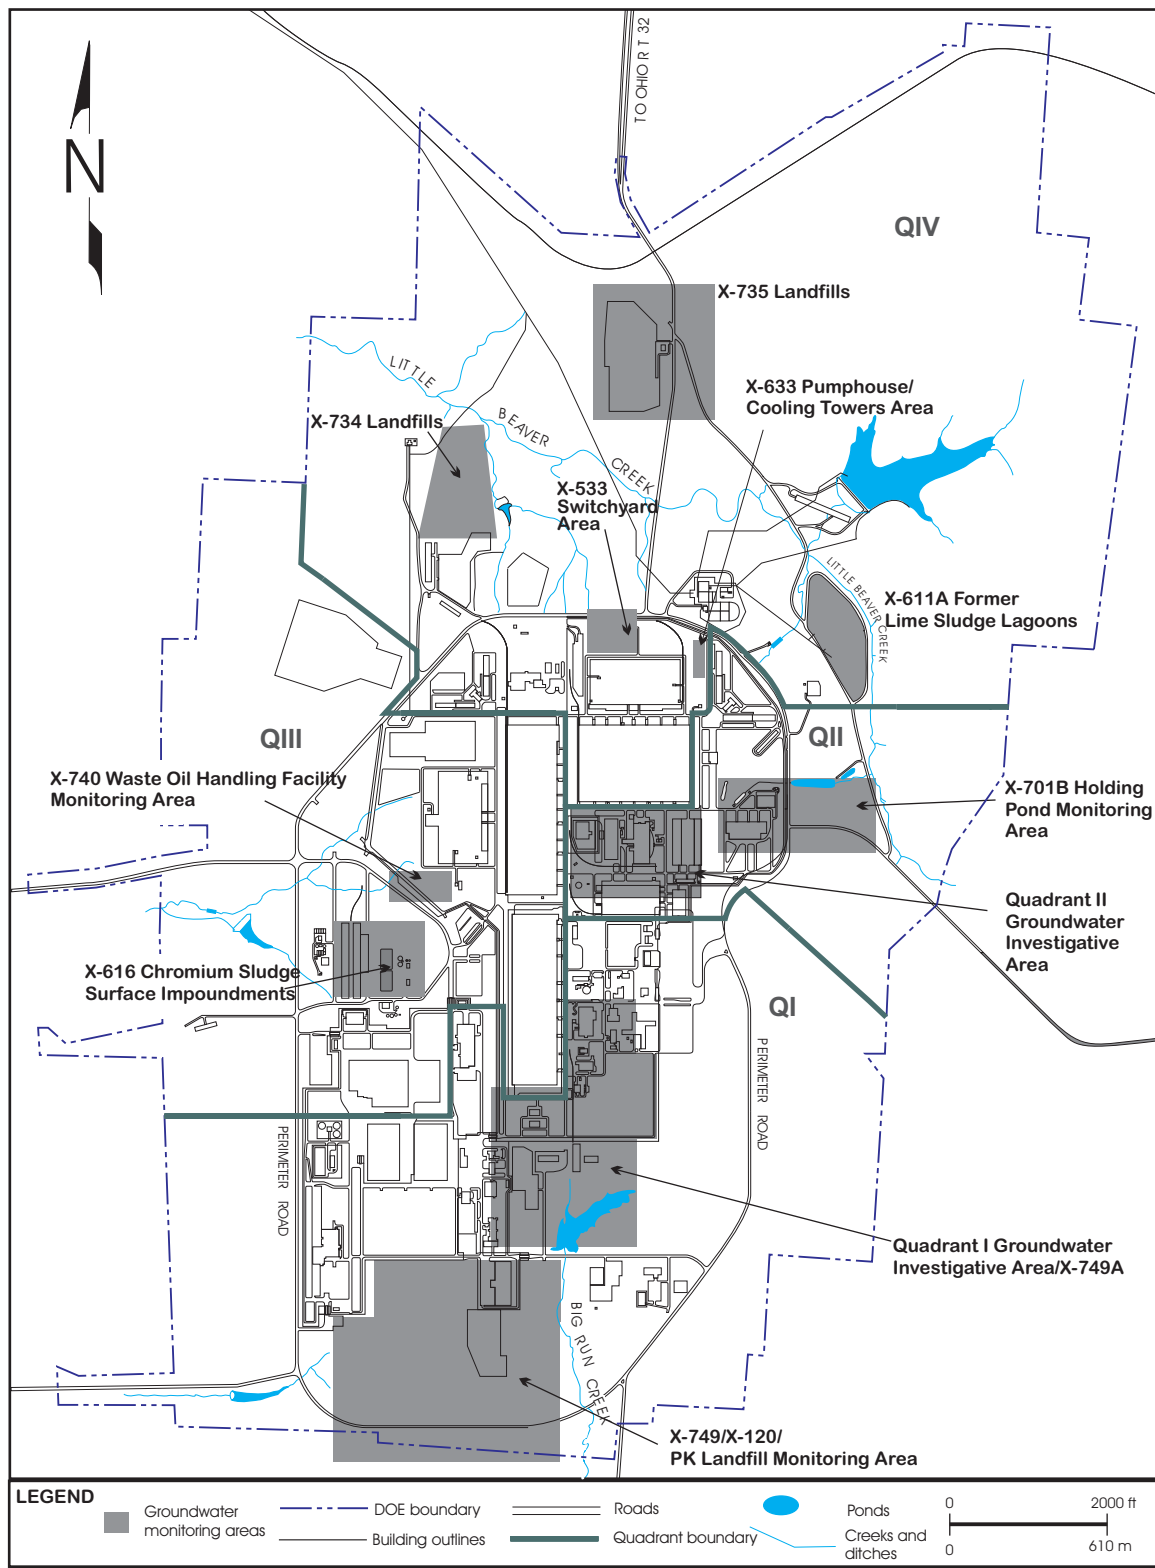


Figure 6.1. Groundwater monitoring areas at PORTS.

Table 6.1. Analytical parameters for monitoring areas and programs at PORTS in 2009

Monitoring Area or Program	Analytes	
X-749/X-120/PK Landfill ^{a,b}		
X-749/X-120 plume	volatile organic compounds ^c transuranics ^d : ²⁴¹ Am, ²³⁷ Np, ²³⁸ Pu, ^{239/240} Pu technetium-99 total U, ^{233/234} U, ²³⁵ U, ²³⁶ U, ²³⁸ U ^d	alkalinity chloride sulfate total metals ^d : As, Ba, Cd, Cr, Pb, Hg, Se, Ag
PK Landfill	volatile organic compounds ^c alkalinity chloride sulfate	total metals ^d : As, Ba, Cd, Cr, Pb, Hg, Se, Ag
Quadrant I Groundwater Investigative Area ^{a,b}		
X-231B plume	volatile organic compounds ^c transuranics ^d : ²⁴¹ Am, ²³⁷ Np, ²³⁸ Pu, ^{239/240} Pu technetium-99 total U, ^{233/234} U, ²³⁵ U, ²³⁶ U, ²³⁸ U ^d	alkalinity chloride sulfate total metals ^d : As, Ba, Cd, Cr, Pb, Hg, Se, Ag
X-749A Classified Materials Disposal Facility	volatile organic compounds ^e transuranics ^d : ²⁴¹ Am, ²³⁷ Np, ²³⁸ Pu, ^{239/240} Pu technetium-99 total U, ^{233/234} U, ²³⁵ U, ²³⁶ U, ²³⁸ U ^c alkalinity chloride sulfate chemical oxygen demand total dissolved solids	total metals ^d : Sb, As, Ba, Be, Cd, Ca, Cr, Co, Cu, Fe, Pb, Mg, Mn, Ni, K, Se, Ag, Na, Tl, V, Zn nitrite nitrate ammonia Appendix II ^f
Quadrant II Groundwater Investigative Area ^{a,b}		
	volatile organic compounds ^c transuranics ^d : ²⁴¹ Am, ²³⁷ Np, ²³⁸ Pu, ^{239/240} Pu technetium-99 total U, ^{233/234} U, ²³⁵ U, ²³⁶ U, ²³⁸ U ^d	alkalinity chloride sulfate total metals ^d : As, Ba, Cd, Cr, Pb, Hg, Se, Ag
X-701B Holding Pond ^{a,b}		
	volatile organic compounds ^c transuranics ^d : ²⁴¹ Am, ²³⁷ Np, ²³⁸ Pu, ^{239/240} Pu technetium-99 total U, ^{233/234} U, ²³⁵ U, ²³⁶ U, ²³⁸ U ^d	alkalinity chloride sulfate total metals ^d : Ca, Cd, Co, Cr, Fe, Mg, Mn, K, Pb, Na, Ni, Tl
X-633 Pumphouse/Cooling Towers Area	total metals ^d : Cr	

Table 6.1. Analytical parameters for monitoring areas and programs at PORTS – 2009 (continued)

Monitoring Area or Program	Analytes	
X-616 Chromium Sludge Surface Impoundments	volatile organic compounds ^c transuranics ^d : ²⁴¹ Am, ²³⁷ Np, ²³⁸ Pu, ^{239/240} Pu technetium-99 total U, ^{233/234} U, ²³⁵ U, ²³⁶ U, ²³⁸ U ^d	alkalinity chloride sulfate total metals ^d : Ca, Fe, Mg, K, Na, Ba, Cd, Co, Cr, Pb, Mn, Ni, Sb, Tl
X-740 Waste Oil Handling Facility ^a	volatile organic compounds ^c	
X-611A Former Lime Sludge Lagoons	total metals ^d : Be, Cr	
X-735 Landfills	volatile organic compounds ^e transuranics ^d : ²⁴¹ Am, ²³⁷ Np, ²³⁸ Pu, ^{239/240} Pu technetium-99 total U, ^{233/234} U, ²³⁵ U, ²³⁶ U, ²³⁸ U ^d alkalinity chloride sulfate chemical oxygen demand total dissolved solids	total metals ^d : Sb, As, Ba, Be, Cd, Ca, Cr, Co, Cu, Fe, Hg, Pb, Mg, Mn, Ni, K, Se, Ag, Na, Tl, V, Zn nitrite nitrate ammonia Appendix II ^f
X-734 Landfills	volatile organic compounds ^e transuranics ^d : ²⁴¹ Am, ²³⁷ Np, ²³⁸ Pu, ^{239/240} Pu technetium-99 total U, ^{233/234} U, ²³⁵ U, ²³⁶ U, ²³⁸ U ^d alkalinity chloride sulfate chemical oxygen demand total dissolved solids	total metals ^d : Sb, As, Ba, Be, Cd, Ca, Cr, Co, Cu, Fe, Pb, Mg, Mn, Ni, K, Se, Ag, Na, Tl, V, Zn nitrite nitrate ammonia
X-533 Switchyard Area	total metals ^d : Cd, Co, Ni	
Surface Water	volatile organic compounds ^c transuranics ^d : ²⁴¹ Am, ²³⁷ Np, ²³⁸ Pu, ^{239/240} Pu technetium-99 total U, ^{233/234} U, ²³⁵ U, ²³⁶ U, ²³⁸ U ^d	alkalinity chloride sulfate total metals ^d : Ca, Fe, Mg, K, Na
Water Supply	volatile organic compounds ^c transuranics ^d : ²⁴¹ Am, ²³⁷ Np, ²³⁸ Pu, ^{239/240} Pu technetium-99 total U, ^{233/234} U, ²³⁵ U, ²³⁶ U, ²³⁸ U ^d	alkalinity chloride sulfate total metals ^d : Ca, Fe, Mg, K, Na

Table 6.1. Analytical parameters for monitoring areas and programs at PORTS – 2009 (continued)

Monitoring Area or Program	Analytes	
Exit Pathway ^b	volatile organic compounds ^c transuranics ^d : ²⁴¹ Am, ²³⁷ Np, ²³⁸ Pu, ^{239/240} Pu technetium-99 total U, ^{233/234} U, ²³⁵ U, ²³⁶ U, ²³⁸ U ^d	alkalinity chloride sulfate total metals ^d : Ca, Fe, Mg, K, Na

^aSelected well(s) in this area are sampled once every two years for a comprehensive list of over 200 potential contaminants (Title 40, Code of Federal Regulations, Part 264 Appendix IX – Appendix to Ohio Administrative Code Rule 3745-54-98).

^bNot all wells in this area are analyzed for all listed analytes.

^cAcetone, benzene, bromodichloromethane, bromoform, carbon disulfide, carbon tetrachloride, chlorobenzene, chloroethane, chloroform, dibromochloromethane, 1,2-dichlorobenzene, 1,4-dichlorobenzene, 1,1-dichloroethane, 1,2-dichloroethane, 1,1-dichloroethene, cis-1,2-dichloroethene, trans-1,2-dichloroethene, ethylbenzene, bromomethane, chloromethane, methylene chloride, 2-butanone (methyl ethyl ketone), 4-methyl-2-pentanone (methyl isobutyl ketone), 1,1,2,2-tetrachloroethane, tetrachloroethene, toluene, 1,1,1-trichloroethane, 1,1,2-trichloroethane, trichloroethene, trichlorofluoromethane (CFC-11), vinyl chloride, xylenes (M+P xylenes).

^dAppendix C lists the symbols for metals and transuranic radionuclides.

^eVolatile organic compounds listed in footnote c plus: acrylonitrile, bromochloromethane, 1,2-dibromo-3-chloropropane, 1,2-dibromoethane, trans-1,4-dichloro-2-butene, 1,2-dichloropropane, cis-1,3-dichloropropene, trans-1,3-dichloropropene, 2-hexanone (methyl butyl ketone), dibromomethane, iodomethane, styrene, 1,1,1,2-tetrachloroethane, 1,2,3-trichloropropane, and vinyl acetate.

^fAppendix II constituents (selected metals, organics, and pesticides) as listed in Ohio Administrative Code Rule 3745-29-10 effective June 1, 1994.

6.4.1.1 X-749 Contaminated Materials Disposal Facility

The X-749 Contaminated Materials Disposal Facility is a landfill located in the south-central section of the facility in Quadrant I. The landfill covers approximately 7.5 acres and was built in an area of highest elevation within the southern half of PORTS. The landfill operated from 1955 to 1990, during which time buried wastes were generally contained in metal drums or other containers compatible with the waste.

The northern portion of the X-749 Landfill contains waste contaminated with industrial solvents, waste oils from plant compressors and pumps, sludges classified as hazardous, and low-level radioactive materials. The southern portion of the X-749 Landfill contains non-hazardous, low-level radioactive scrap materials.

The initial closure of the X-749 Landfill in 1992 included installation of (1) a multimedia cap, (2) a barrier wall along the north side and northwest corner of X-749 Landfill, and (3) subsurface groundwater drains on the northern half of the east side and the southwest corner of the landfill, including one sump within each of the groundwater drains. The barrier wall and subsurface drains extended down to bedrock. An additional barrier wall on the south and east sides of the X-749 Landfill was constructed in 2002. The groundwater drain and sump on the east side of the landfill were removed for construction of this barrier wall. Groundwater from the remaining subsurface drain is treated at the X-622 Groundwater Treatment Facility and discharged through LPP NPDES Outfall 608, which flows to the USEC Sewage Treatment Plant.

In 2002 and 2003, hybrid poplar trees were planted in several areas of the X-749/X-120 groundwater plume. The trees are used in a process called phytoremediation to degrade or contain contaminants in soil and/or groundwater. Chapter 3, Section 3.2.1.1, provides additional information about the remedial actions implemented to address the X-749/X-120 groundwater plume.

The leading edge of the contaminated groundwater plume emanating from the X-749 Landfill has been approaching the southern boundary of PORTS. In 1994, a subsurface barrier wall was completed across a portion of this southern boundary of PORTS. The X-749 South Barrier Wall was designed to inhibit migration of the plume off plant property prior to the implementation of a final remedial measure; however, volatile organics have moved beyond the wall. In 2007, four groundwater extraction wells were installed in the X-749 South Barrier Wall Area, and in 2008, two extraction wells were installed in the groundwater collection system on the southwest side of the landfill. These extraction wells are controlling migration of the plume off plant property and reducing concentrations of trichloroethene in groundwater.

In addition to routine sampling required by the *Integrated Groundwater Monitoring Plan*, monitoring of the X-749/X-120 groundwater plume also included sampling required by the *Work Plan for the X-749/X-120 Area Groundwater Optimization Project*. Ninety-seven wells were sampled during 2009 to monitor the X-749/X-120 area. Table 6.1 lists the analytical parameters for the wells in this area.

6.4.1.2 X-120 Old Training Facility

The X-120 Old Training Facility, which is west and north of the X-749 Contaminated Materials Disposal Facility, covered an area of approximately 11.5 acres near the present-day XT-847 building. The X-120 facility, which no longer exists, included a machine shop, metal shop, paint shop, and several warehouses used during the construction of PORTS in the 1950s. Groundwater in the vicinity of this facility is contaminated with volatile organic compounds, primarily trichloroethene. In 1996, a horizontal well was installed along the approximate axis of the X-120 plume. Contaminated groundwater flowed

from this well to the X-625 Groundwater Treatment Facility. In 2003, operation of the X-625 Groundwater Treatment Facility and horizontal well ceased with the approval of Ohio EPA due to the limited amount of groundwater collected by the well.

Ninety-seven wells were sampled during 2009 to monitor the X-749/X-120 area. Table 6.1 lists the analytical parameters for the wells in this area.

6.4.1.3 PK Landfill

The PK Landfill is located west of Big Run Creek just south of the X-230K Holding Pond in Quadrant I. The landfill, which began operations in 1952, was used as a salvage yard, burn pit, and trash area during the construction of PORTS. After the initial construction, the disposal site was operated as a sanitary landfill until 1968, when soil was graded over the site and the area was seeded with native grasses.

During site investigations, intermittent seeps were observed emanating from the PK Landfill into Big Run Creek. In 1994, a portion of Big Run Creek was relocated approximately 50 feet to the east. A groundwater collection system was installed in the old creek channel to capture the seeps emanating from the landfill. A second collection system was constructed in 1997 on the southeastern landfill boundary to contain the groundwater plume migrating toward Big Run Creek from the southern portion of the PK landfill. A cap was constructed over the landfill in 1998. Chapter 3, Section 3.2.1.2, provides additional information about the remedial actions implemented at PK Landfill.


In 2009, nine wells, two manholes, and two sumps were sampled to monitor the PK Landfill area. Table 6.1 lists the analytical parameters for the wells, manholes, and sumps in this area.

6.4.1.4 Monitoring results for the X-749/X-120/PK Landfill in 2009

A contaminated groundwater plume is associated with the X-749/X-120/PK Landfill groundwater monitoring area (see Figure 6.2) in Quadrant I. The most extensive and most concentrated constituents associated with the X-749/X-120 plume are volatile organic compounds, particularly trichloroethene.

Concentrations of trichloroethene are decreasing in numerous wells within the X-749/X-120 plume due to the extraction wells installed in the X-749 South Barrier Wall Area (X749-EW01G, X749-EW02G, X749-EW03G, and X749-EW04G) and the additional extraction wells installed in the collection trench on the southwest side of the X-749 Landfill (X749-EW05G and X749-EW06G). The decreasing trichloroethene concentrations within the plume mean that the higher concentrations of trichloroethene in and around the X-749 Landfill (over 100 µg/L) are no longer connected to the area of higher concentrations (100 to 1000 µg/L) to the west and south of the landfill. The decrease in trichloroethene concentrations in two wells (X749-27G and X749-113G) appears to indicate that the new extraction wells installed in the groundwater collection system on the southwest side of the trench are controlling the trichloroethene source within the landfill and migration of higher trichloroethene concentrations outside the landfill.

Concentrations of trichloroethene in the X-749 South Barrier Wall Area south of the extraction wells have decreased to less than 6 µg/L, which is just above the EPA drinking water standard of 5 µg/L. By the end of 2009, trichloroethene was detected in only one off-site monitoring well (WP-03G) at a concentration less than 1 µg/L. Trichloroethene had also been detected at concentrations less than 5 µg/L in off-site monitoring wells WP-01G and WP-07G in previous sampling events in 2009 or 2008. Figure 6.2 provides data for selected X-749/X-120 monitoring wells that illustrate the decreasing trichloroethene concentrations in the wells.

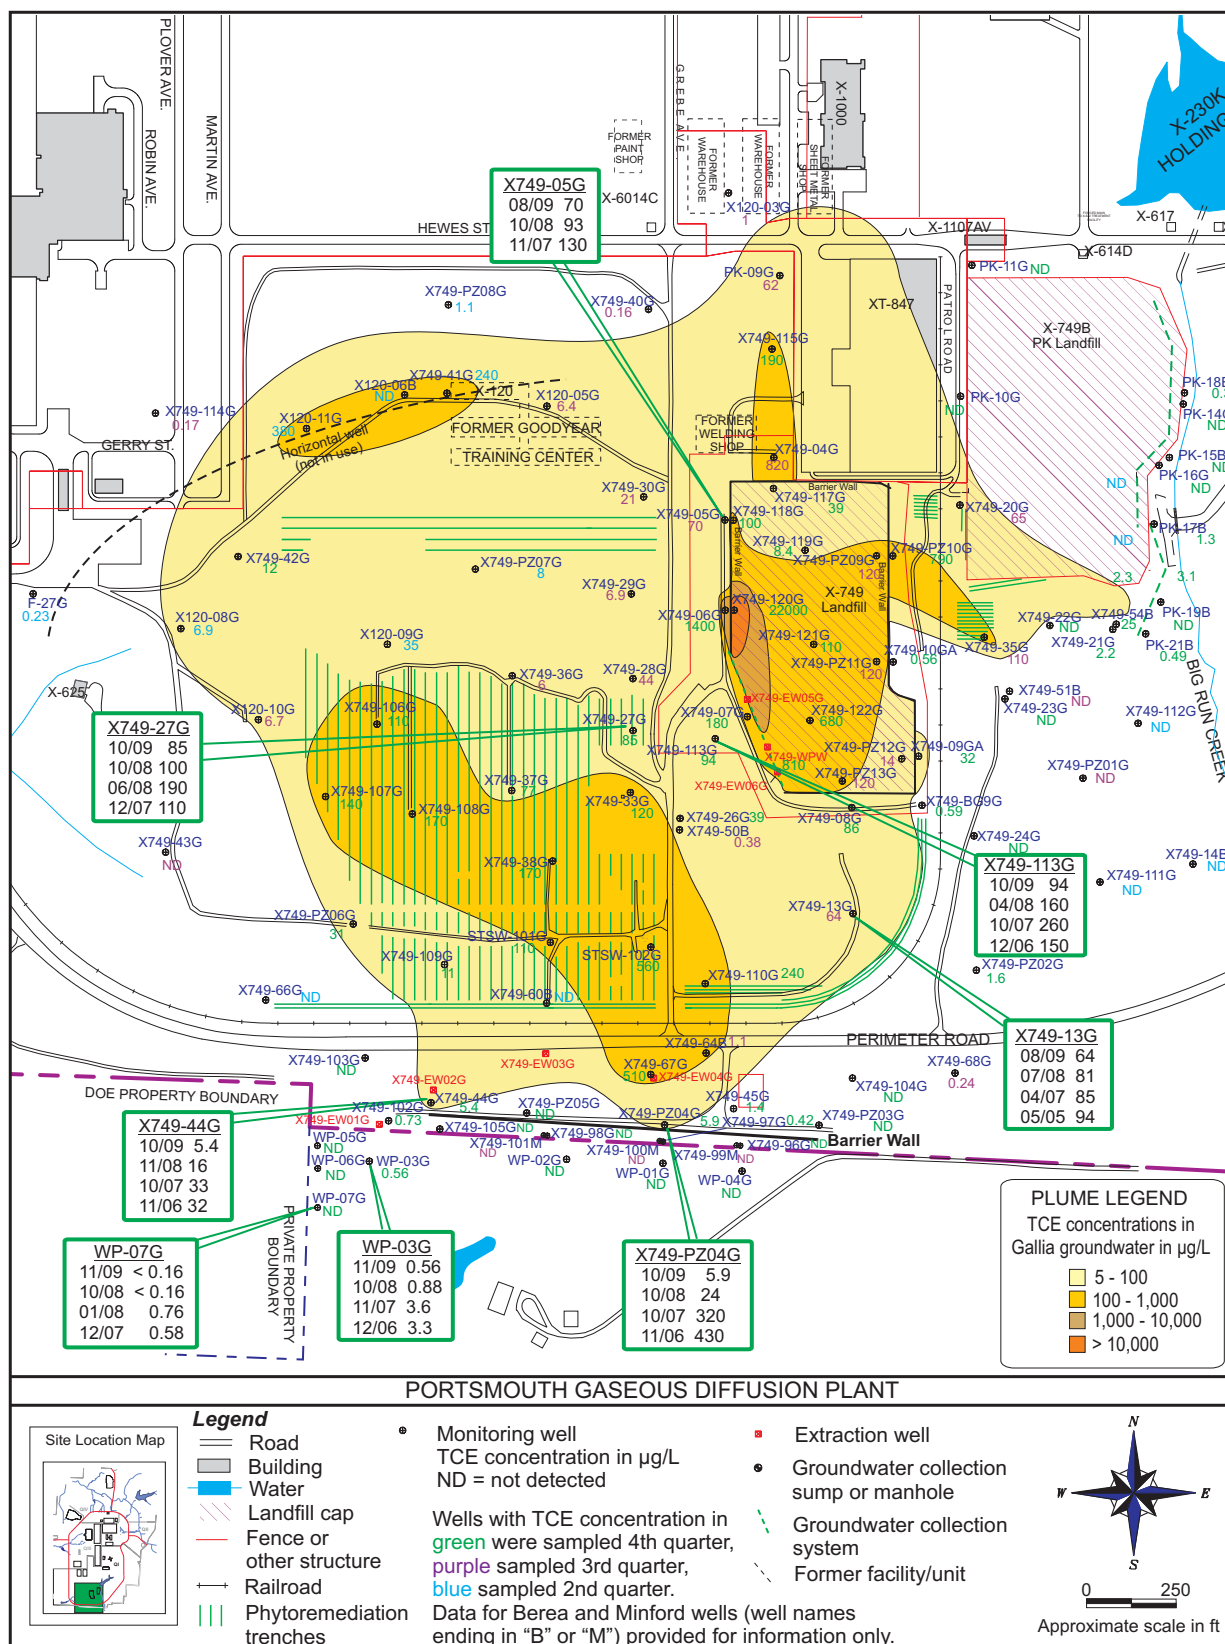

Some of the wells associated with the PK Landfill are also contaminated with low levels of volatile organic compounds, but usually at concentrations below preliminary remediation goals. Vinyl chloride, however, was detected in samples collected from wells PK-17B and PK-21B at concentrations ranging from 8.9 to 18 µg/L, which exceed the preliminary remediation goal of 2 µg/L. Vinyl chloride is typically detected in these wells.

6.4.2 Quadrant I Groundwater Investigative Area/X-749A Classified Materials Disposal Facility

In the northern portion of Quadrant I, groundwater concerns are focused on two areas: the Quadrant I Groundwater Investigative Area and the X-749A Classified Materials Disposal Facility.

6.4.2.1 Quadrant I Groundwater Investigative Area

The Quadrant I Groundwater Investigative Area, also called the Five-Unit Groundwater Investigative Area, consists of a groundwater plume resulting from a number of potential sources of groundwater contamination: the X-231A and X-231B Oil Biodegradation Plots, X-600 Coal-Fired Steam Plant, X-600A Coal Pile Yard, X-621 Coal Pile Runoff Treatment Facility, X-710 Technical Services Building, X-749A Classified Materials Disposal Facility, the X-760 Pilot Investigation Building, and the X-770 Mechanical Testing Facility. The X-231B Southwest Oil Biodegradation Plot was monitored prior to implementation of the *Integrated Groundwater Monitoring Plan*.

Three groundwater extraction wells were installed in 1991 as part of an interim remedial measure for the X-231B Southwest Oil Biodegradation Plot. Eleven additional groundwater extraction wells were installed in 2001-2002 as part of the remedial actions required by the Quadrant I Decision Document. These wells began operation in 2002. An additional extraction well south of the X-326 Process Building began operating in April in 2009. The extracted groundwater is treated at the X-622 Groundwater Treatment Facility and discharged through LPP NPDES Outfall 608, which flows into the USEC Sewage Treatment Plant. Multimedia landfill caps were installed over the former X-231B area and a similar area, X-231A, in 2000 to minimize water infiltration and control the spread of contamination. Chapter 3, Section 3.2.1.3, provides additional information about the remedial actions implemented in the Quadrant I Groundwater Investigative Area.

Twenty-eight wells were sampled in 2009 as part of the monitoring program for the Quadrant I Groundwater Investigative Area. Table 6.1 lists the analytical parameters for the wells in this area.

6.4.2.2 X-749A Classified Materials Disposal Facility

The 6-acre X-749A Classified Materials Disposal Facility is a landfill that operated from 1953 through 1988 for the disposal of wastes classified under the Atomic Energy Act. Potential contaminants include PCBs, asbestos, radionuclides, and industrial waste. Closure of the landfill, completed in 1994, included the construction of a multilayer cap and the installation of a drainage system to collect surface water runoff. The drainage system discharges via a USEC NPDES-permitted outfall.

Assessment monitoring of the X-749A Landfill began in 2007 and continued in 2009. Sixteen wells associated with the landfill were sampled in 2009. Table 6.1 lists the analytical parameters for the wells in this area.

6.4.2.3 Monitoring results for the Quadrant I Groundwater Investigative Area/X-749A in 2009

A contaminated groundwater plume consisting primarily of trichloroethene is associated with the Quadrant I Groundwater Investigative Area (see Figure 6.3). Other volatile organic compounds are also present in the plume.

The perimeter of the groundwater plume in the Quadrant I Groundwater Investigative Area shrank in 2009 due to decreasing concentrations of trichloroethene detected in two wells in the southern portion of the plume (X230K-14G and X231B-12G). Concentrations of trichloroethene are also decreasing in a number of wells within the plume. Trichloroethene is increasing in one well (X326-09G) in the western portion of the plume; a groundwater extraction well (X622-EW12G) began operating in 2009 to remediate this contaminant source. Figure 6.3 provides data for selected Quadrant I Groundwater Investigative Area monitoring wells that illustrate the decreasing and increasing trichloroethene concentrations in the wells.

Assessment monitoring began at the X-749A Landfill in 2007 and continued through 2009. Monitoring of the X-749A Landfill will continue as required by the *Integrated Groundwater Monitoring Plan* and Ohio EPA.


6.4.3 Quadrant II Groundwater Investigative Area

The Quadrant II Groundwater Investigative Area consists of an area of groundwater contamination with several potential sources. One of these sources, the X-701C Neutralization Pit, was monitored prior to implementation of the *Integrated Groundwater Monitoring Plan*. The X-701C Neutralization Pit was an open-topped neutralization pit that received process effluents and basement sump wastewater such as acid and alkali solutions and rinse water contaminated with trichloroethene and/or trichloroethane from metal-cleaning operations. The X-701C Neutralization Pit was located within a trichloroethene plume centered around the X-700 and X-705 buildings. The pit was removed in 2001. In 2009, an investigation was completed to identify other potential sources contributing to the groundwater plume in this area. Chapter 3, Section 3.2.2 provides additional information about the Quadrant II Groundwater Investigative Area.

The natural groundwater flow direction in this area is to the east toward Little Beaver Creek. The groundwater flow pattern has been changed in this area by use of sump pumps in the basements of the X-700 and X-705 buildings. Thus, the groundwater plume in this area does not spread but instead flows toward the sumps where it is collected and then treated at the X-627 Groundwater Treatment Facility. This facility discharges through LPP NPDES Outfall 611, which flows to the USEC Sewage Treatment Plant. Eighteen wells are sampled annually or biennially as part of the monitoring program for this area. Table 6.1 lists the analytical parameters for the wells in this area.

6.4.3.1 Monitoring results for the Quadrant II Groundwater Investigative Area in 2009

A contaminated groundwater plume consisting primarily of trichloroethene is associated with the Quadrant II Groundwater Investigative Area (see Figure 6.4). A special investigation conducted in 2009, which sampled groundwater in temporary wells, determined that the western edge of the Quadrant II Groundwater Investigative Area plume is further west than previously known and appears to extend under the X-330 Process Building. Trichloroethene concentrations are increasing in two wells in the western portion of the plume (X705-02G and X705-03G), which may be related to the higher concentrations of trichloroethene identified near the X-330 Process Building. Trichloroethene concentrations are decreasing in two wells in the northern portion of the plume (X705-06G and X705-07G).

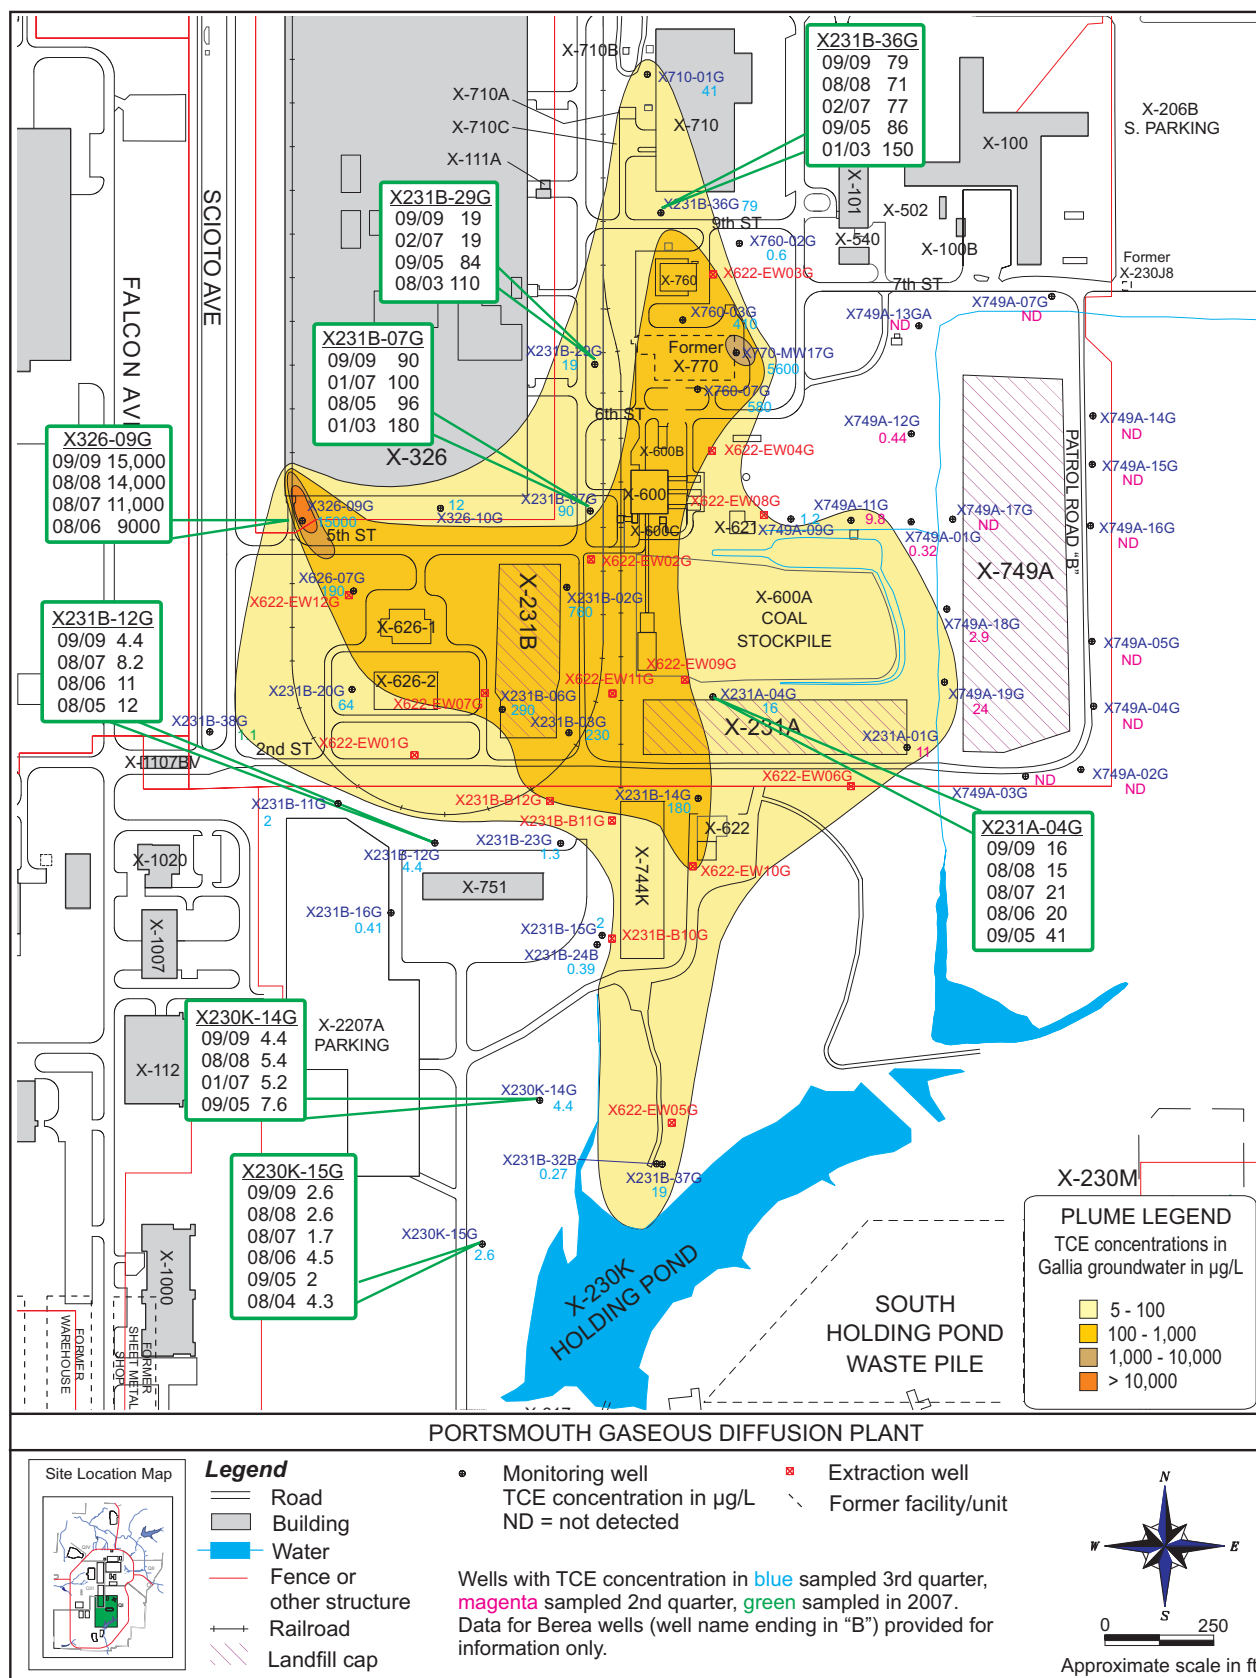

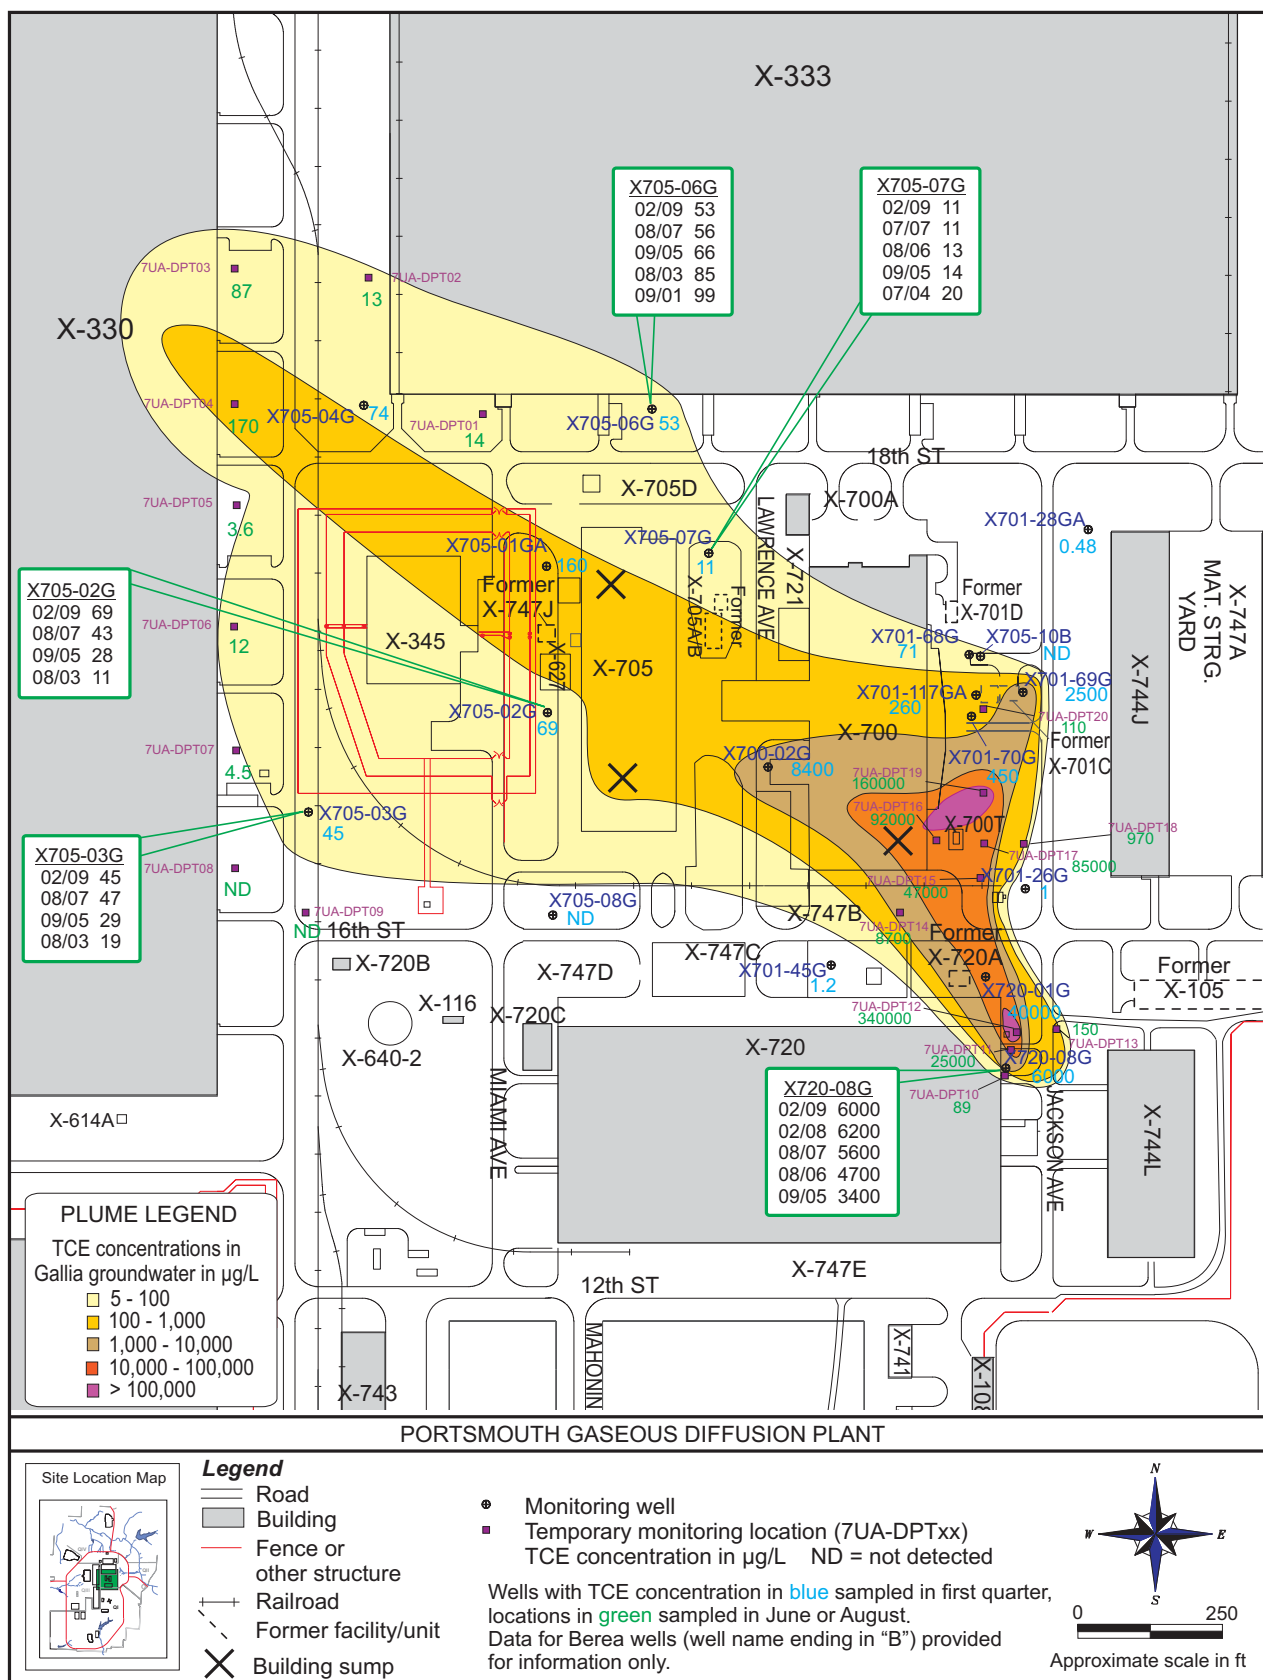


Figure 6.4. Trichloroethene-contaminated Gallia groundwater plume at the Quadrant II Groundwater Investigative Area – 2009.

Areas of higher trichloroethene concentrations were also identified within the southeastern portion of the plume near the former X-720 Neutralization Pit on the northeast side of the X-720 Building and the X-700T Aboveground Storage Tank. Figure 6.4 provides data for selected Quadrant II Groundwater Investigative Area monitoring wells that illustrate the decreasing and increasing trichloroethene concentrations in the wells.

6.4.4 X-701B Holding Pond

In the eastern portion of Quadrant II, groundwater concerns focus on three areas: the X-701B Holding Pond, the X-230J7 Holding Pond, and the X-744Y Waste Storage Yard.

The X-701B Holding Pond was used from the beginning of plant operations in 1954 until November 1988. The pond was designed for neutralization and settlement of acid waste from several sources. Trichloroethane and trichloroethene were also discharged to the pond. Two surface impoundments (sludge retention basins) were located west of the holding pond. The X-230J7 Holding Pond received wastewater from the X-701B Holding Pond. The X-744Y Waste Storage Yard is south of the X-701B Holding Pond. The yard is approximately 15 acres and surrounds the X-744G Bulk Storage Building. RCRA hazardous waste was managed in this area.

A contaminated groundwater plume extends from the X-701B Holding Pond towards Little Beaver Creek. Three groundwater extraction wells were installed southeast of the X-701B Holding Pond as part of the ongoing RCRA closure of the unit. These wells were designed to intercept contaminated groundwater emanating from the holding pond area before it could join the existing groundwater contaminant plume. Extracted groundwater is processed at the X-623 Groundwater Treatment Facility and discharged through LPP NPDES Outfall 610, which flows to the USEC Sewage Treatment Plant. This facility also processes water recovered from a shallow sump in the bottom of the X-701B Holding Pond.


Two groundwater interceptor trenches (French drains) are used to intercept trichloroethene-contaminated groundwater emanating from X-701B. These interceptor trenches, called the X-237 Groundwater Collection System, control trichloroethene migration into Little Beaver Creek. The 660-foot-long primary trench has two sumps in the backfill and a 440-foot-long secondary trench intersects the primary trench. The extracted groundwater is treated at the X-624 Groundwater Treatment Facility and discharges through LPP NPDES Outfall 015, which flows to Little Beaver Creek.

Remedial actions have begun in the X-701B Pond area to reduce concentrations of trichloroethene in soil and groundwater. Chapter 3, Section 3.2.2, provides additional information about remedial actions at the X-701B Holding Pond area.

Forty-one wells were sampled in 2009 as part of the monitoring program for this area. Table 6.1 lists the analytical parameters for the wells in this area.

6.4.4.1 Monitoring results for the X-701B Holding Pond in 2009

The trichloroethene plume associated with the X-701B Holding Pond area contains the highest concentrations of trichloroethene measured in groundwater at PORTS, routinely over 250,000 µg/L in two of the groundwater monitoring wells near the middle of the plume. The plume perimeter did not change significantly from 2008 to 2009 (see Figure 6.5), although concentrations of trichloroethene are decreasing in one well in the center of the plume (X701-21G). In most other wells within the X-701B plume, concentrations of trichloroethene detected in 2009 were consistent with previous data.

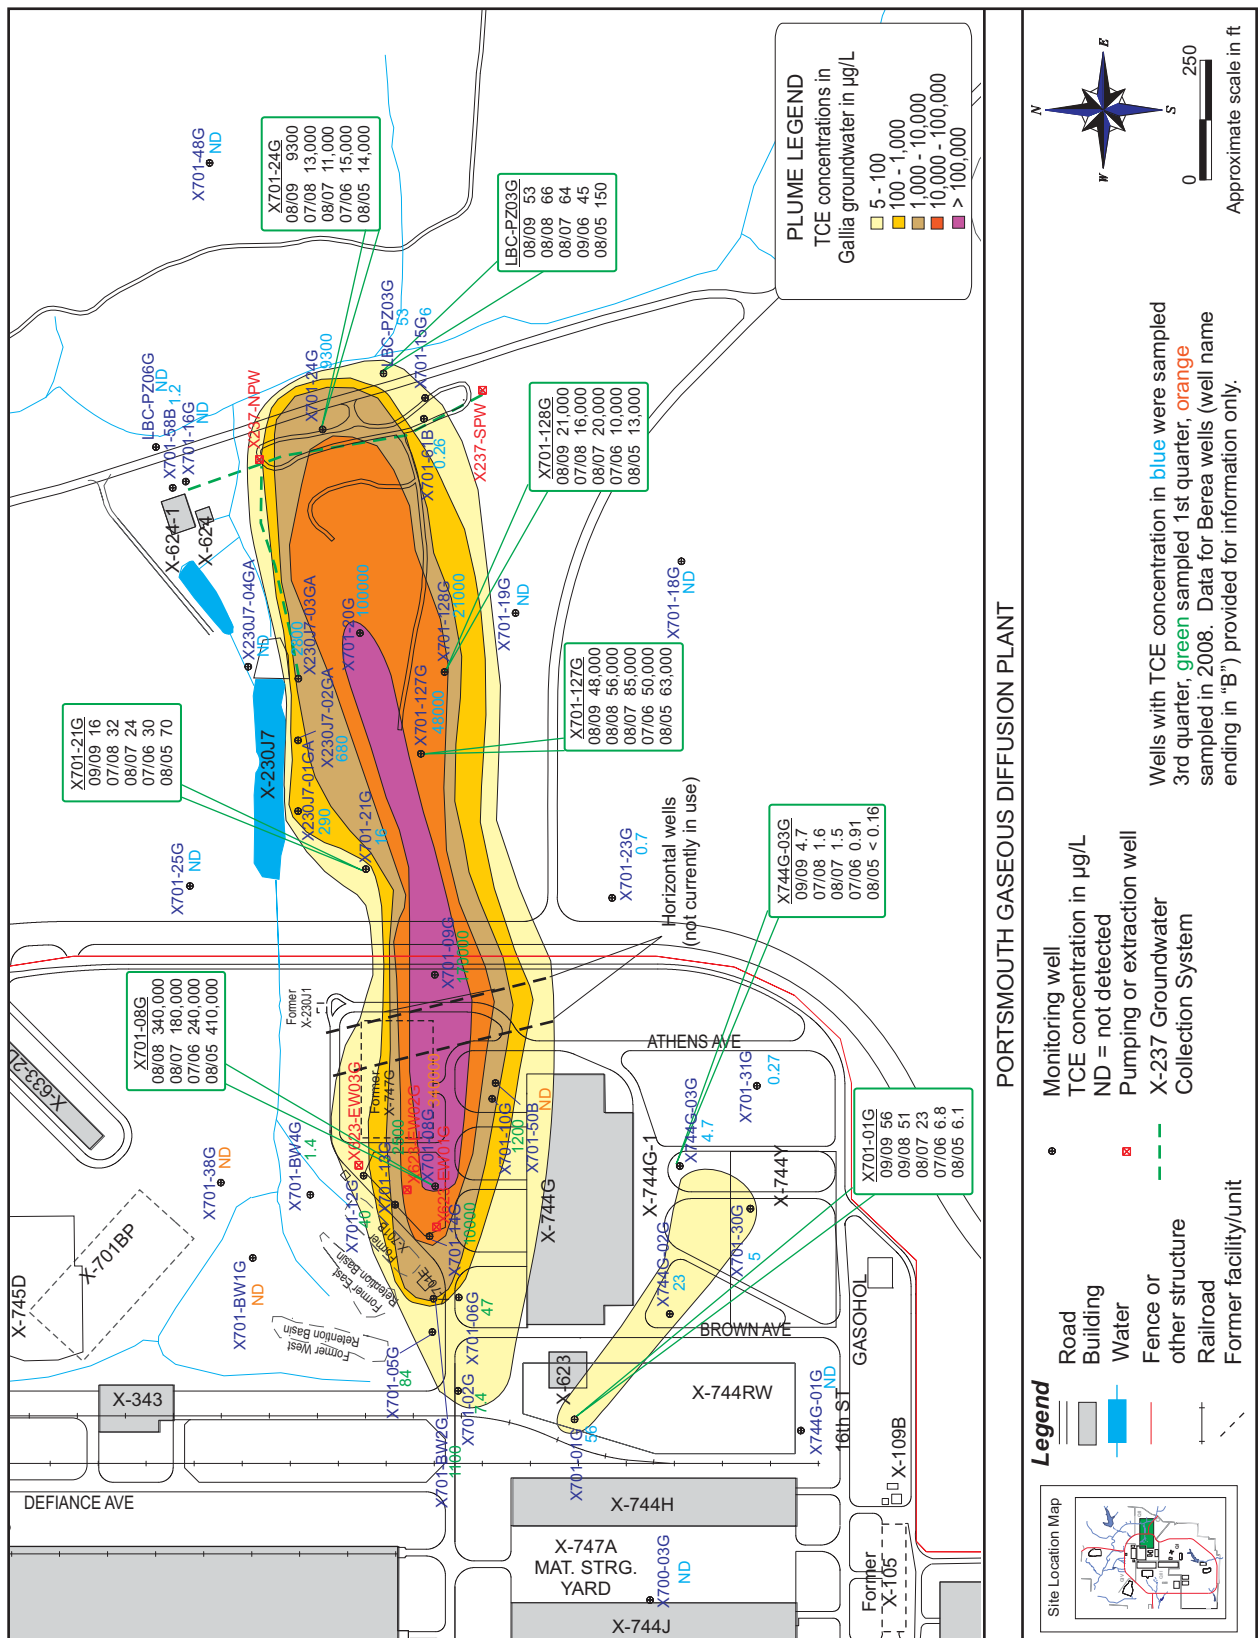

The second trichloroethene plume in the X-701B monitoring area (the plume southwest of the X-744G Bulk Storage Building) did not change significantly in 2009; however concentrations of trichloroethene are increasing in two of the wells that monitor this plume (X701-01G and X744G-03G). Data for these wells are shown on Figure 6.5.

Samples from five wells in or near the X-744Y Storage Yard and X-744G Bulk Storage Building were analyzed for cadmium and nickel, which were detected above preliminary remediation goals in three of the five wells (X701-01G, X744G-01G, and X744G-02G). These results are typical for the X-744 area wells.

6.4.5 X-633 Pumphouse/Cooling Towers Area

The X-633 Pumphouse/Cooling Towers Area in Quadrant II consists of a recirculating water pumphouse and four cooling towers with associated basins. Chromium-based corrosion inhibitors were added to the cooling water until the early 1990s, when the system was converted to a phosphate-based inhibitor.

The X-633 Pumphouse/Cooling Towers Area was identified as an area of concern for potential metals contamination in 1996 based on historical analytical data for groundwater wells in this area. Samples from wells in this area were collected in 1998 and 1999 to assess the area for metals contamination. Based on the results for these samples, this area was added to the PORTS groundwater monitoring program. Two wells are sampled semiannually for chromium as part of the monitoring program for this area.

6.4.5.1 Monitoring results for the X-633 Pumphouse/Cooling Towers Area in 2009

Chromium was detected in both of the X-633 monitoring wells in 2009. Samples collected from well X633-07G contained chromium at concentrations above the preliminary remediation goal of 100 µg/L: 310 µg/L (second quarter) and 560 µg/L (fourth quarter). Samples collected from well X633-PZ04G also contained chromium but at concentrations well below the preliminary remediation goal. These results are typical for these wells. Figure 6.6 shows the chromium concentrations detected in the X-633 Pumphouse/Cooling Tower area wells.

6.4.6 X-616 Chromium Sludge Surface Impoundments

The X-616 Chromium Sludge Surface Impoundments in Quadrant III were two unlined surface impoundments used from 1976 to 1985 for storage of sludge generated by the treatment of water from the PORTS process cooling system. A corrosion inhibitor containing chromium was used in the cooling water system. Sludge containing chromium was produced by the water treatment system and was pumped into and stored in the X-616 impoundments. The sludge was removed from the impoundments and remediated as an interim action in 1990 and 1991. The unit was certified closed in 1993. Seven wells are sampled annually and nine wells are sampled biennially as part of the monitoring program for this area. Table 6.1 lists the analytical parameters for the wells in this area.

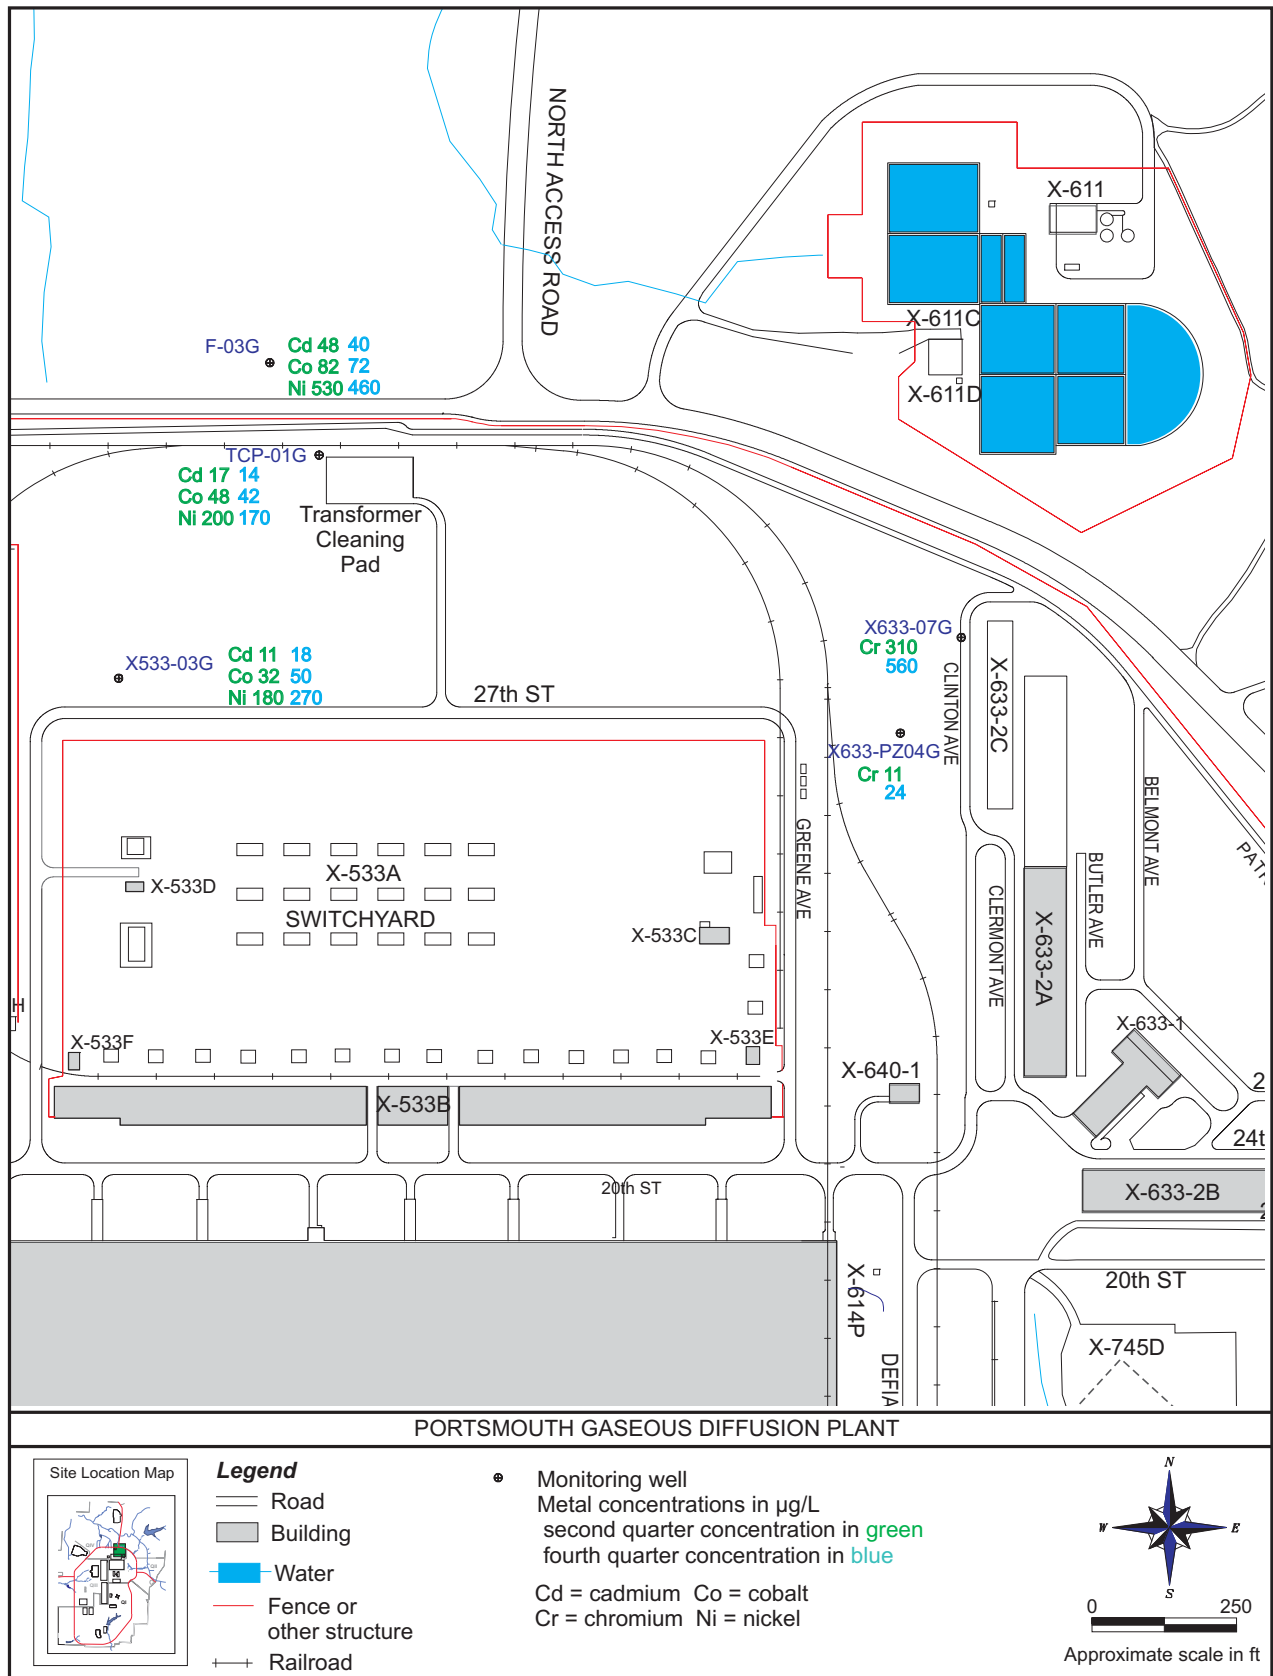


Figure 6.6. Metal concentrations in groundwater at the X-633 Pumphouse/Cooling Towers Area and X-533 Switchyard Area – 2009.

6.4.6.1 Monitoring results for the X-616 Chromium Sludge Surface Impoundments in 2009

Chromium is of special concern at X-616 because of the previous use of the area. In 2009, chromium was detected at 500 µg/L in the sample collected from well X616-05G. Chromium was not detected at concentrations above the preliminary remediation goal (100 µg/L) in any other X-616 well. Concentrations of chromium detected in well X616-05G have exceeded the preliminary remediation goal in previous years as well. Nickel was also detected above the preliminary remediation goal (100 µg/L for Gallia wells) in two wells (X616-05G and X616-25G). Nickel is typically detected above the preliminary remediation goal in these two wells. Figure 6.7 shows the concentrations of chromium and nickel in wells at the X-616 Chromium Sludge Surface Impoundments.

Volatile organic compounds were detected at low levels in samples collected from seven wells in this area. The only volatile organic compounds detected above the preliminary remediation goals were 1,1-dichloroethene and trichloroethene, which were detected in wells X616-09G and/or X616-20B. Figure 6.7 shows the concentrations of trichloroethene detected in the X-616 wells.

6.4.7 X-740 Waste Oil Handling Facility

The former X-740 Waste Oil Handling Facility, which was demolished in 2006, was located on the western half of PORTS south of the X-530A Switchyard in Quadrant III. The X-740 facility, which operated from 1983 until 1991, was used as an inventory and staging facility for waste oil and waste solvents that were generated from various plant operational and maintenance activities. A sump within the building was used between 1986 and 1990 to collect residual waste oil and waste solvents from containers crushed in a hydraulic drum crusher at the facility. The facility and sump were initially identified as hazardous waste management units in 1991. The X-740 Waste Oil Handling Facility (both the facility and sump identified as hazardous waste management units) underwent closure, and closure certification was approved by Ohio EPA in 1998.

In 1999, poplar trees were planted in a 2.6-acre phytoremediation area above the groundwater plume near the X-740 Waste Oil Handling Facility. Because phytoremediation has not worked as anticipated to reduce the concentrations of volatile organics in groundwater in this area, three rounds of oxidant injections were completed during 2008. Additional alternatives for groundwater remediation in this area were evaluated in 2009. Chapter 3, Section 3.2.3, provides additional information about these remedial activities.

Seventeen wells were sampled in the first and/or second quarters of 2009. Table 6.1 lists the analytical parameters for the wells in this area. With implementation of the revised *Integrated Groundwater Monitoring Plan* in the third quarter of 2009, routine monitoring at the X-740 Waste Oil Handling Facility was discontinued. Monitoring of the area will continue as part of the special studies to evaluate remedial alternatives for the area.

6.4.7.1 Monitoring results for the X-740 Waste Oil Handling Facility in 2009

A contaminated groundwater plume consisting of primarily trichloroethene is located near the X-740 Waste Oil Handling Facility (see Figure 6.8) in Quadrant III. The perimeter of the X-740 groundwater plume did not change significantly in 2009. The oxidant that was injected into the X-740 groundwater plume during May through September of 2008 briefly reduced trichloroethene concentrations detected in some of the wells (X740-03G and X740-09B), but concentrations generally returned to typical levels in 2009. Figure 6.8 provides data from before, during, and after the oxidant injections for selected wells that monitor the X-740 groundwater plume.

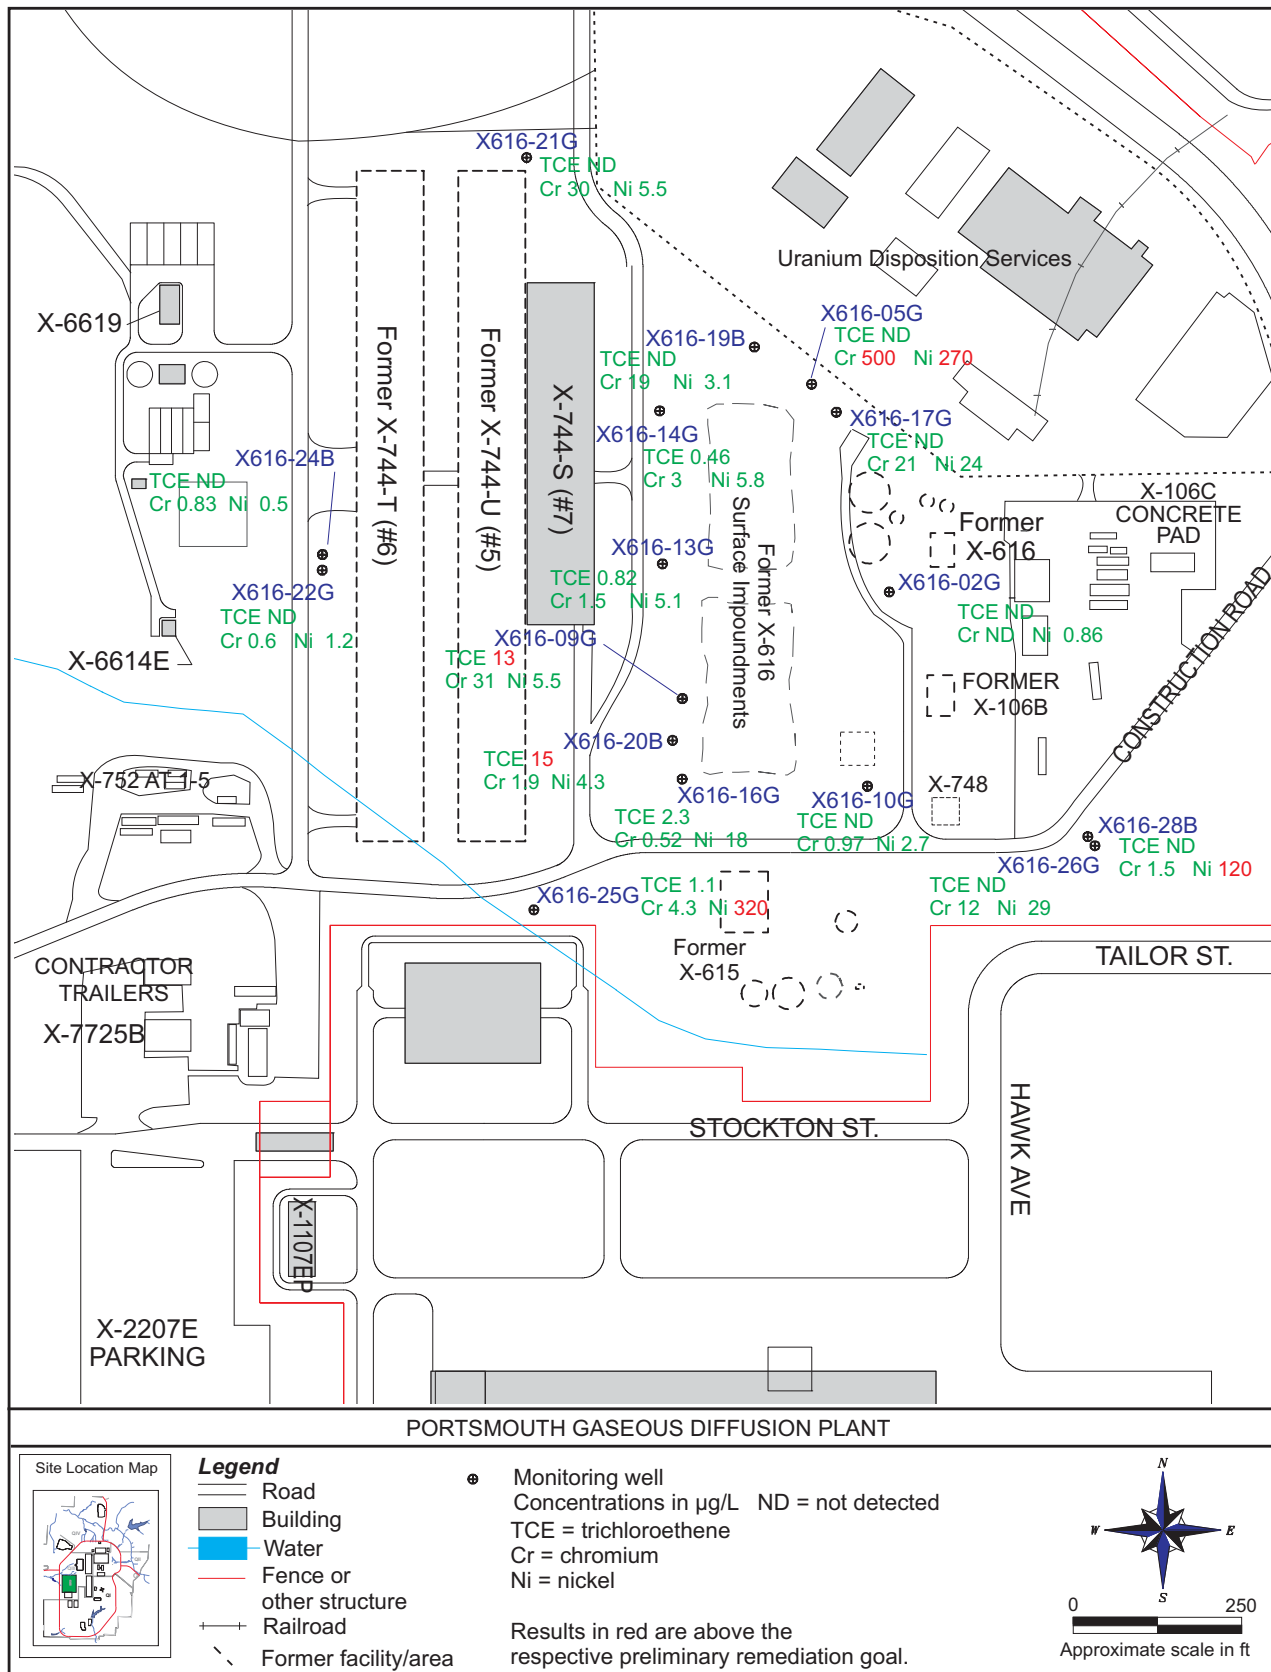


Figure 6.7. Trichloroethene and metal concentrations in groundwater at the X-616 Chromium Sludge Surface Impoundments – 2009.



6.4.8 X-611A Former Lime Sludge Lagoons

The X-611A Former Lime Sludge Lagoons in Quadrant IV were comprised of three adjacent unlined sludge retention lagoons constructed in 1954 and used for disposal of lime sludge waste from the site water treatment plant from 1954 to 1960. The lagoons covered a surface area of approximately 18 acres and were constructed in a low-lying area that included Little Beaver Creek. As a result, approximately 1500 feet of Little Beaver Creek were relocated to a channel just east of the lagoons.

As part of the RCRA Corrective Action Program, a prairie habitat has been developed in this area by placing a soil cover over the north, middle, and south lagoons. A soil berm was also constructed outside the northern boundary of the north lagoon to facilitate shallow accumulation of water in this low-lying area. Chapter 3, Section 3.2.4, provides more information about this remediation. Six wells are sampled semiannually as part of the monitoring program for this area. Table 6.1 lists the analytical parameters for the wells in this area.

6.4.8.1 Monitoring results for the X-611A Former Lime Sludge Lagoons in 2009

The six monitoring wells at X-611A are sampled and analyzed for beryllium and chromium. In 2009, chromium was detected in four of the six wells in this area at concentrations between 0.62 and 9.5 µg/L. These results are below the preliminary remediation goal (100 µg/L). Beryllium was detected in four of the six wells at concentrations between 0.092 and 5 µg/L. These results are below the preliminary remediation goal (6.5 µg/L for Gallia wells and 7 µg/L for Berea wells). Figure 6.9 shows the concentrations of beryllium and chromium detected in the X-611A wells in 2009.

6.4.9 X-735 Landfills

Several distinct waste management units are contained within the X-735 Landfills area in Quadrant IV. The main units consist of the hazardous waste landfill, referred to as the X-735 Landfill (Northern Portion), and the X-735 Industrial Solid Waste Landfill. The X-735 Industrial Solid Waste Landfill includes the industrial solid waste cells, asbestos disposal cells, and the chromium sludge monocells A and B. The chromium sludge monocells contain a portion of the chromium sludge generated during the closure of the X-616 Chromium Sludge Surface Impoundments.

Initially, a total of 17.9 acres was approved by the Ohio EPA and Pike County Department of Health for landfill disposal of conventional solid wastes. The landfill began operation in 1981. During operation of the landfill, PORTS investigations indicated that wipe rags contaminated with solvents had inadvertently been disposed in the northern portion of the landfill. The contaminated rags were considered a hazardous waste. Waste disposal in the northern area ended in December 1991, and Ohio EPA determined that the area required closure as a RCRA hazardous waste landfill. Consequently, this unit of the sanitary landfill was identified as the X-735 Landfill (Northern Portion).

A buffer zone was left unexcavated to provide space for groundwater monitoring wells and a space between the RCRA landfill unit and the remaining southern portion, the X-735 Industrial Solid Waste Landfill. Routine groundwater monitoring has been conducted at the X-735 Landfills since 1991.

The industrial solid waste portion of the X-735 Landfills included a solid waste section and an asbestos waste section. The X-735 Industrial Solid Waste Landfill, not including the chromium sludge monocells, encompasses a total area of approximately 4.1 acres. Operation of the X-735 Industrial Solid Waste Landfill ceased in 1997; this portion of the landfill was capped in 1998.

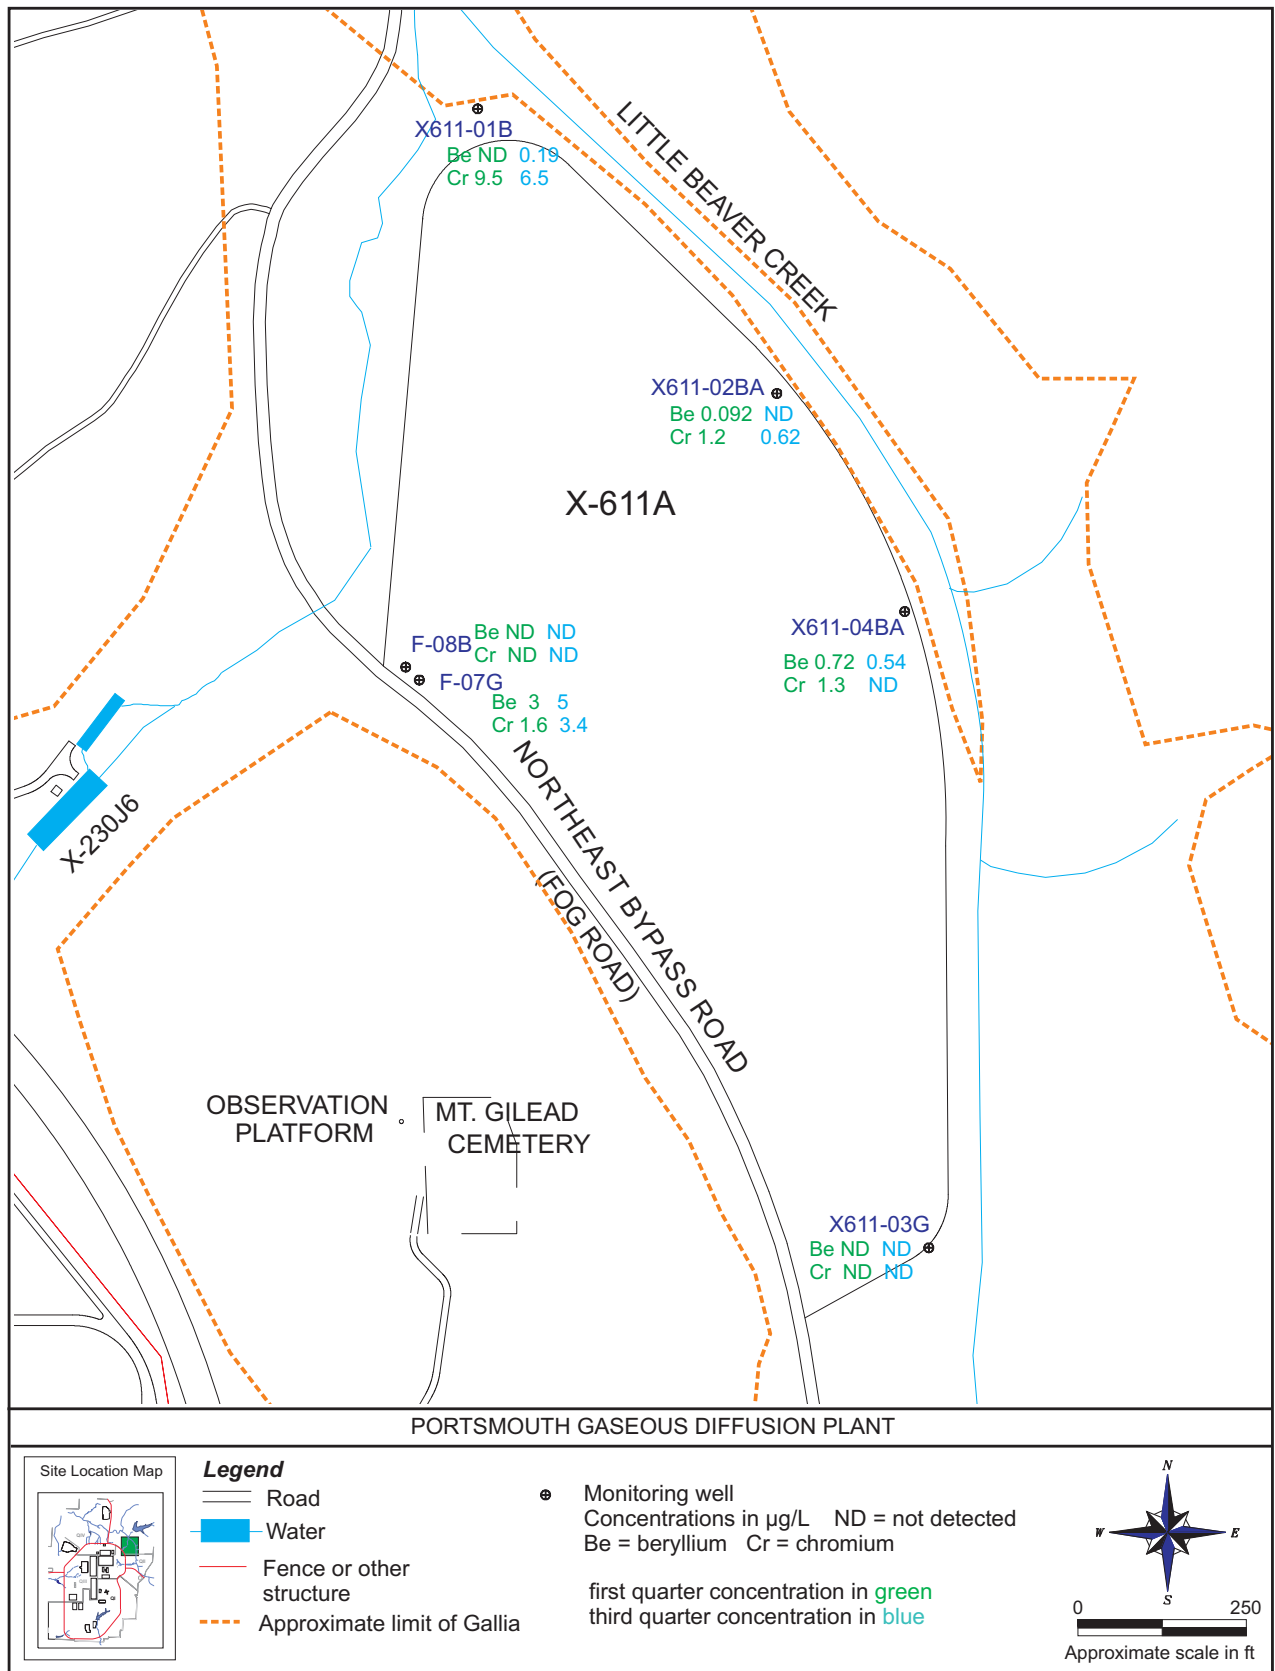


Figure 6.9. Metal concentrations in groundwater at the X-611A Former Lime Sludge Lagoons – 2009.

The *Integrated Groundwater Monitoring Plan* incorporates monitoring requirements for the hazardous and solid waste portions of the X-735 Landfills. In addition, the *Corrective Measures Plan for the X-735 Landfill* was approved by Ohio EPA on March 4, 2008. This plan provides the monitoring requirements for Gallia wells that monitor the X-735 Landfill. Corrective measures monitoring was implemented because Ohio EPA determined that assessment monitoring of the landfill, completed between 2005 and 2007, identified that a small release of leachate constituents is occurring or has occurred from the X-735 Landfills. Twenty-three wells were sampled in 2009 as part of the monitoring programs for this area. Table 6.1 lists the analytical parameters and Figure 6.10 shows the monitoring wells in this area.

6.4.9.1 Monitoring results for the X-735 Landfills in 2009

Several volatile organics were detected in two X-735 monitoring wells in 2009 (X735-01G and X735-03G); however, each of these detections were 1 µg/L or less and below the applicable preliminary remediation goal. As required by the corrective measures monitoring program, concentrations of three metals (cobalt, mercury, and nickel) detected in downgradient Gallia wells are compared to concentration limits based on drinking water standards or site background concentrations. Concentrations of cobalt and nickel detected in the X-735 Landfills downgradient Gallia wells sampled during 2009 did not exceed these limits. Mercury was detected at 2.6 µg/L in the fourth quarter sample collected from well X735-21G, which exceeds the concentration limit of 2 µg/L. As required by the corrective measures monitoring program, the well was resampled in January 2010. The verification sample contained mercury at 1.3 µg/L, which is less than the concentration limit of 2 µg/L.

No transuranics or technetium-99 were detected in the samples collected from the X-735 monitoring wells in 2009. If detected, uranium and uranium isotopes were present at levels typical for these wells and below applicable preliminary remediation goals and drinking water standards.

6.4.10 X-734 Landfills

The X-734 Landfills in Quadrant IV consisted of three landfill units that were used until 1985. Detailed records of materials disposed in the landfills were not kept. However, wastes known to be disposed at the landfills included trash and garbage, construction spoils, wood and other waste from clearing and grubbing, and empty drums. Other materials reportedly disposed in the landfills may have included waste contaminated with metals, empty paint cans, and uranium-contaminated soil from the X-342 area.

The X-734 Landfills were closed in accordance with regulations in effect at that time, and no groundwater monitoring of the area was required. However, the RCRA Facility Investigation conducted in the early 1990s identified the presence of volatile organics, metals, and radionuclides in soil and/or groundwater in the area. The X-734 Landfills were capped in 1999-2000 as part of the remedial actions required for Quadrant IV. Chapter 3, Section 3.2.4, provides more information about the remedial actions for this area.

Fifteen wells (see Figure 6.11) are sampled semiannually as part of the monitoring program for this area. Table 6.1 lists the monitoring parameters for the wells in this area.

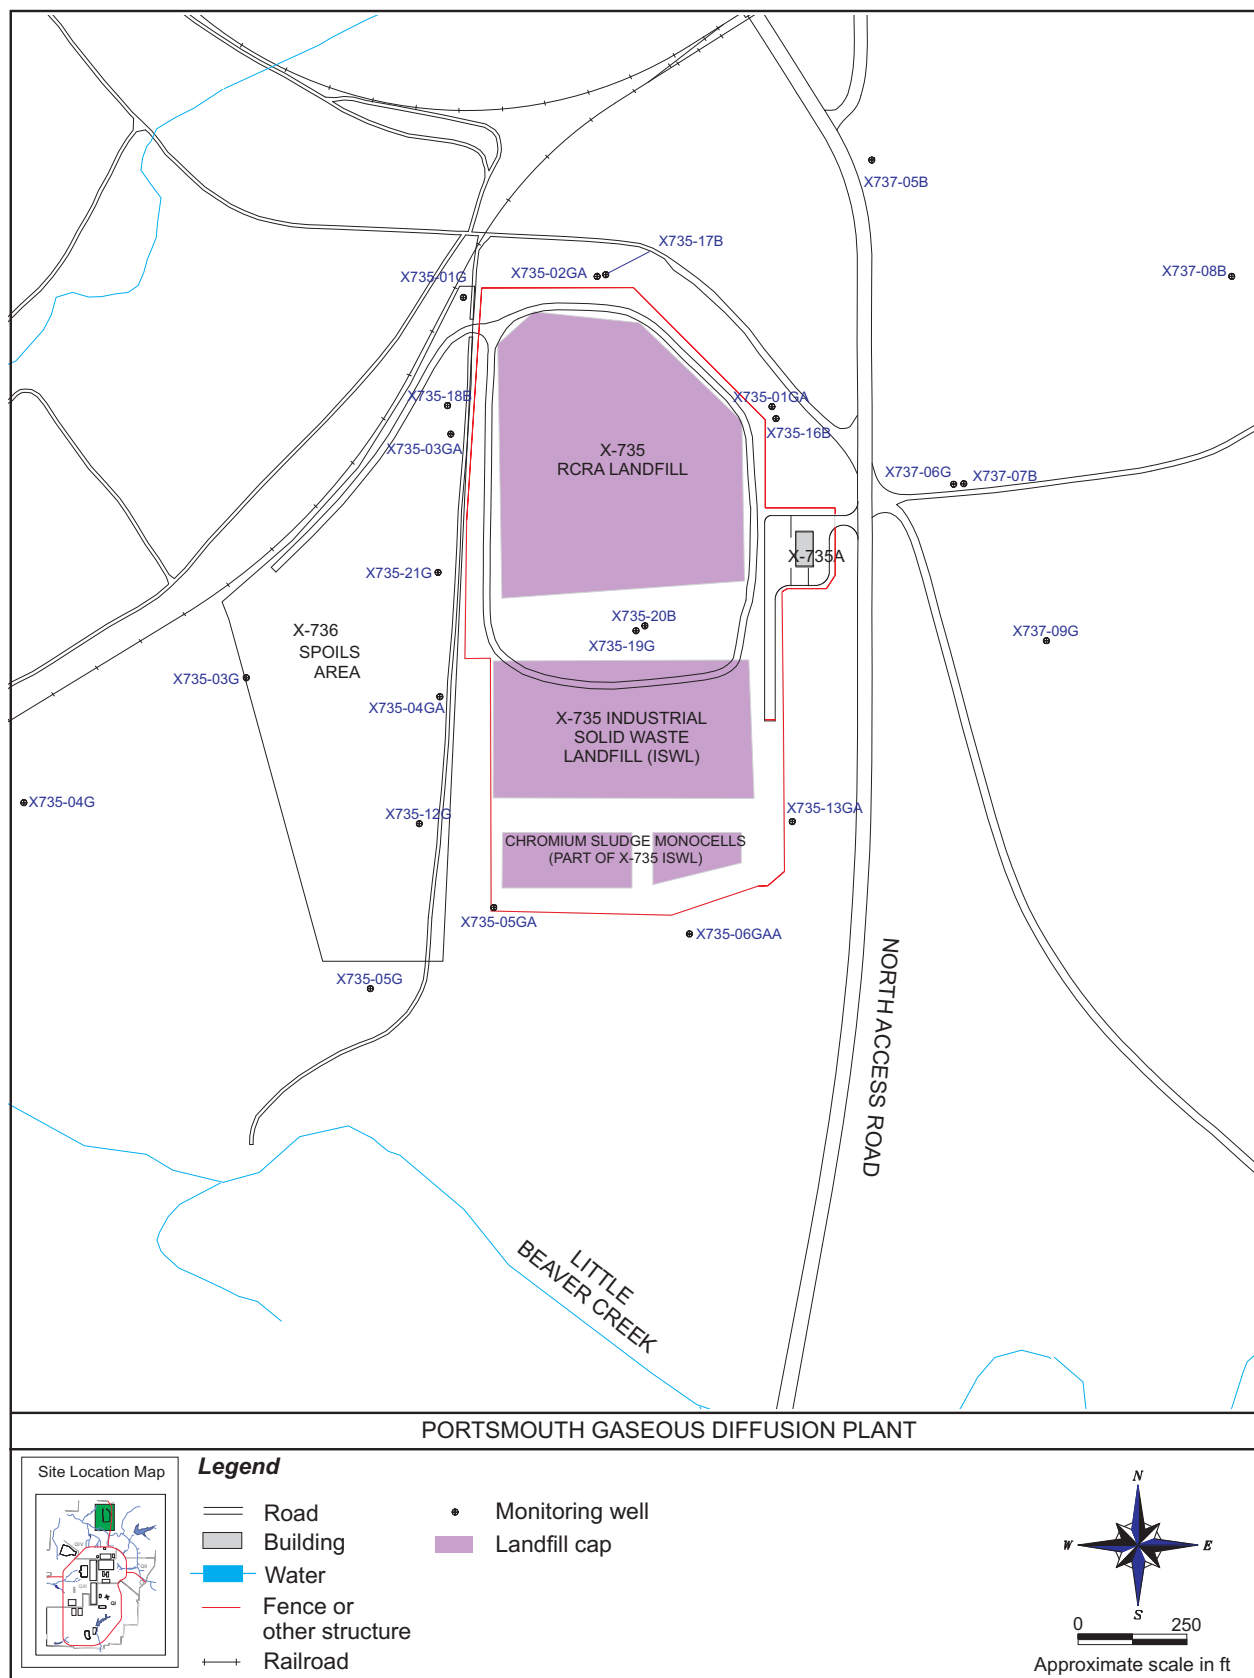


Figure 6.10. Monitoring wells at the X-735 Landfills.

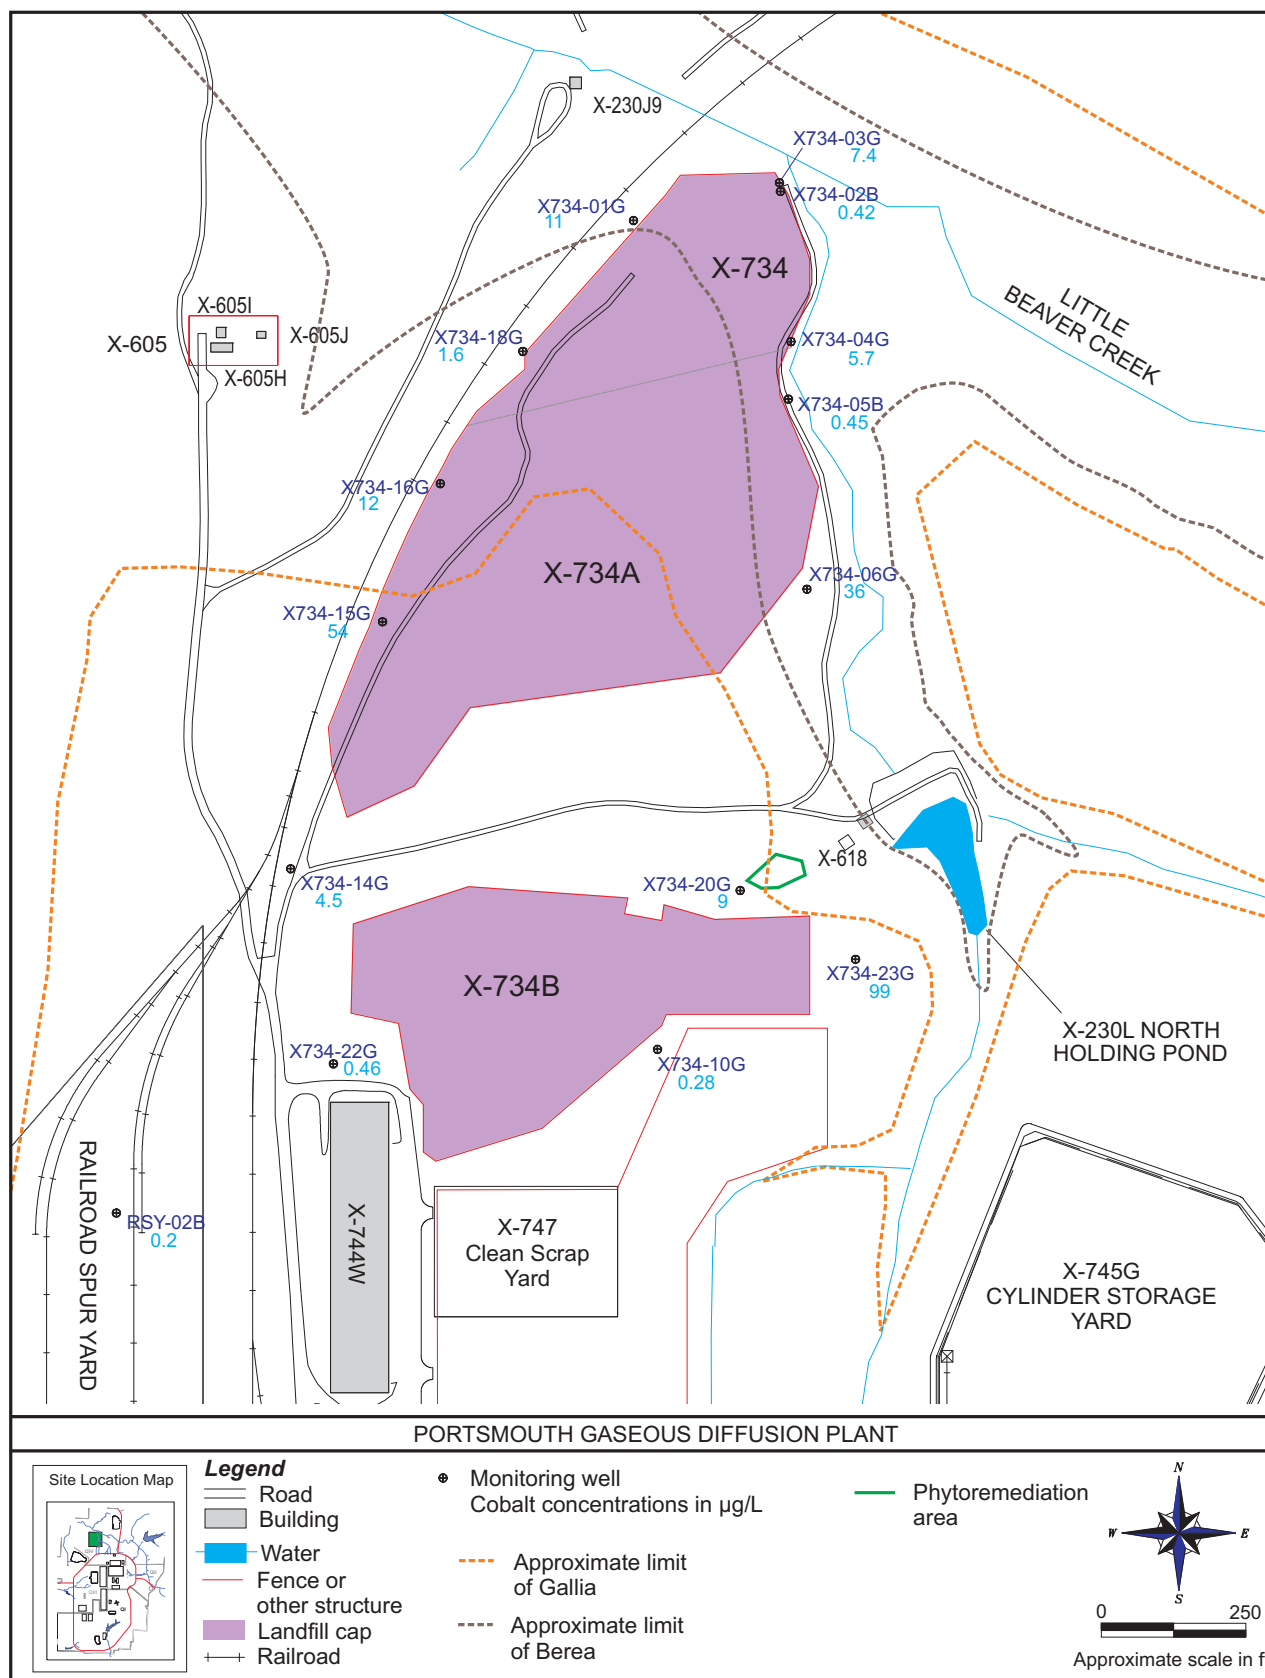


Figure 6.11. Cobalt concentrations in groundwater at the X-734 Landfills – 2009.

6.4.10.1 Monitoring results for the X-734 Landfills in 2009

Volatile organic compounds were detected in samples collected from five wells in the X-734 monitoring area in 2009: wells X734-03G, X734-04G, X734-05B, X734-15G, and X734-23G. Vinyl chloride was the only compound detected that exceeded the preliminary remediation goal (2 µg/L). In the second quarter, vinyl chloride was detected at 3 µg/L in the sample collected from well X734-23G. The presence of vinyl chloride, *cis*-1,2-dichloroethene, and *trans*-1,2-dichloroethene in well X734-23G, along with the low concentrations or absence of trichloroethene, may indicate that trichloroethene is breaking down naturally beneath the X-734 Landfills.

Cobalt is also monitored in the X-734 Landfills area. In 2009, cobalt was detected in three wells (X734-06G, X734-15G, and X734-23G) at concentrations exceeding the preliminary remediation goal of 13 µg/L for Gallia wells (see Figure 6.11).

No transuranics or technetium-99 were detected in any of the X-734 Landfills well samples collected in 2009. If detected, uranium and uranium isotopes were present at levels typical for these wells and below applicable preliminary remediation goals and drinking water standards.

6.4.11 X-533 Switchyard Area

The X-533 Switchyard Area in Quadrant IV consists of a switchyard containing electrical transformers and circuit breakers, associated support buildings, and a transformer cleaning pad. The groundwater area of concern is located north of the switchyard and associated support buildings near the transformer cleaning pad.

The X-533 Switchyard Area was identified as an area of concern for potential metals contamination in 1996 based on historical analytical data for groundwater wells in this area. Samples from wells in this area were collected in 1998 and 1999 to assess the area for metals contamination. The area was added to the PORTS groundwater monitoring program because the sampling identified three metals (cadmium, cobalt, and nickel) that may have contaminated groundwater in this area. Three wells are sampled semiannually for cadmium, cobalt, and nickel.

6.4.11.1 Monitoring results for the X-533 Switchyard Area in 2009

Three wells that monitor the X-533 Switchyard Area were sampled in the second and fourth quarters of 2009 and analyzed for cadmium, cobalt, and nickel. Each of the well samples contained these metals at concentrations above the preliminary remediation goals (6.5 µg/L for cadmium, 13 µg/L for cobalt, and 100 µg/L for nickel). Concentrations of cadmium detected in the wells ranged from 11 to 48 µg/L, concentrations of cobalt detected in the wells ranged from 32 to 82 µg/L, and concentrations of nickel detected in the wells ranged from 170 to 530 µg/L. Figure 6.6 shows the concentrations of metals detected in the X-533 wells in 2009.

6.4.12 Surface Water Monitoring

Surface water monitoring is conducted in conjunction with groundwater assessment monitoring to determine if contaminants present in groundwater are detected in surface water samples. Surface water is collected quarterly from 13 locations (see Figure 6.12). Surface water samples are analyzed for the parameters listed in Table 6.1. The purpose for each surface water monitoring location is described as follows:

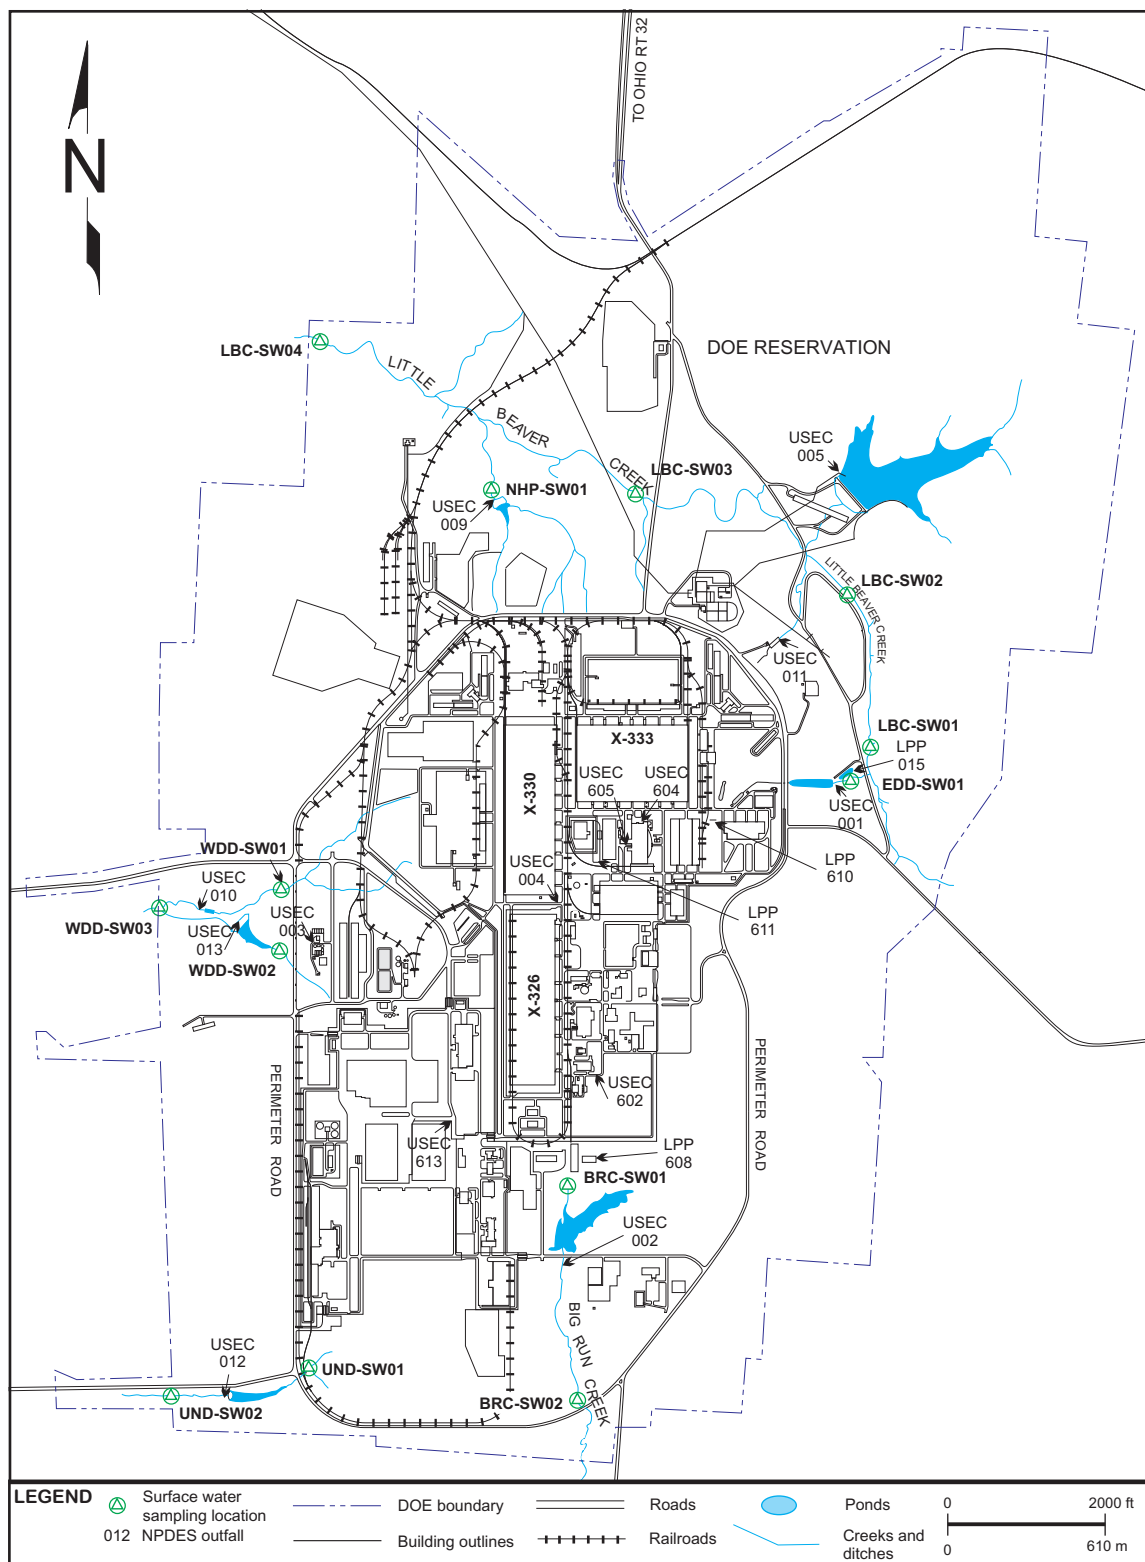


Figure 6.12. Surface water monitoring locations.

- Little Beaver Creek and East Drainage Ditch sample locations LBC-SW01, LBC-SW02, and EDD-SW01 assess possible X-701B area plume groundwater discharges.
- Little Beaver Creek sample locations LBC-SW02 and LBC-SW03 assesses potential contamination from the Former X-611A Lime Sludge Lagoons.
- Big Run Creek sample locations BRC-SW01 and BRC-SW02 assess potential groundwater discharges from the Quadrant I Groundwater Investigative Area plume and the PK Landfill area to the X-230K Holding Pond (Quadrant I Groundwater Investigative Area only) and Big Run Creek.
- Southwestern Drainage Ditch sample locations UND-SW01 and UND-SW02 assess potential groundwater releases to this creek and the X-2230M Southwest Holding Pond from the western portion of the X-749/X-120 groundwater plume.
- North Holding Pond sample location NHP-SW01 and Little Beaver Creek sample location LBC-SW04 assess potential groundwater discharges from the X-734 Landfill and other Quadrant IV sources.
- Western Drainage Ditch sample locations WDD-SW01, WDD-SW02, and WDD-SW03 assess potential groundwater discharges from the X-616 and X-740 areas to the Western Drainage Ditch and the X-2230N West Holding Pond.

6.4.12.1 Monitoring results for surface water in 2009

Trihalomethanes are a category of volatile organic compounds that are byproducts of water chlorination and include bromodichloromethane, bromoform, chloroform, and dibromochloromethane. These compounds are detected at most of the surface water sampling locations because the streams receive discharges that contain chlorinated water from the PORTS NPDES outfalls. These detections were well below the applicable Ohio EPA water quality criteria for the protection of human health in the Ohio River drainage basin (bromodichloromethane – 460 µg/L; bromoform – 3600 µg/L; chloroform – 4700 µg/L; and dibromochloromethane – 340 µg/L).

Since 1990, trichloroethene has been detected regularly at low levels in samples collected from the Southwestern Drainage Ditch (UND-SW01, located inside Perimeter Road). In 2009, trichloroethene was detected at concentrations ranging from 0.25 to 5.7 µg/L in the four samples collected from the Southwestern Drainage Ditch at UND-SW01. Other volatile organics detected in one or more samples collected at UND-SW01 are 1,1-dichloroethane, 1,1-dichloroethene, and *cis*-1,2-dichloroethene. Each of these detections was estimated at concentrations of less than 1 µg/L. Concentrations of volatile organic compounds detected at the Southwestern Drainage Ditch sampling location UND-SW01 were below applicable Ohio EPA water quality criteria (if available) for the protection of human health in the Ohio River drainage basin. These criteria are 810 µg/L for trichloroethene and 32 µg/L for 1,1-dichloroethene. With the exception of 2-butanone and acetone, which are sample contaminants, no volatile organics were detected at UND-SW02, which is downstream from UND-SW01.

Trichloroethene and/or *cis*-1,2-dichloroethene were routinely detected at estimated concentrations less than 1 µg/L in the samples collected from East Drainage Ditch sampling location EDD-SW01 and Little Beaver Creek sampling locations LBC-SW01 and LBC-SW02. Neither of these chemicals were detected in samples collected from downstream Little Beaver Creek sampling locations LBC-SW03 and LBC-SW04. The detections of trichloroethene were well below the applicable Ohio EPA water quality criterion for trichloroethene (810 µg/L) for the protection of human health in the Ohio River drainage basin.

Trichloroethene, tetrachloroethene, and/or *cis*-1,2-dichloroethene were detected at estimated concentrations less than 0.6 µg/L in two samples collected from Big Run Creek in 2009. These detections are below applicable Ohio EPA water quality criteria (if available) for the protection of human health in the Ohio River drainage basin: 810 µg/L for trichloroethene and 89 µg/L for tetrachloroethene.

Surface water samples are analyzed for transuranic radionuclides (americium-241, neptunium-237, plutonium-238, and plutonium-239/240). No transuranics were detected in the surface water samples collected during 2009.

In the first quarter of 2009, technetium-99 was detected at activities less than 16 pCi/L in samples collected from the East Drainage Ditch and Little Beaver Creek at locations EDD-SW01, LBC-SW01, and LBC-SW02. Technetium-99 is occasionally detected at these locations. Technetium-99 was also detected at 18 pCi/L in the fourth quarter sample collected from Big Run Creek at sampling location BRC-SW01. These detections are well below the EPA drinking water standard for technetium-99 (900 pCi/L, based on a 4 mrem/year dose from beta emitters).

Uranium and uranium isotopes were detected at levels higher than typically detected in the third quarter sample collected from Big Run Creek sampling location BRC-SW01. Uranium was present at 20.9 µg/L, uranium-233/234 at 6.27 pCi/L, uranium-235 at 0.3192 pCi/L, and uranium-238 at 6.994 pCi/L. The concentration of uranium detected in the sample is less than the drinking water standard for uranium (30 µg/L). Detections of uranium isotopes were well below the DOE derived concentration guide for the respective uranium isotope in drinking water (500 pCi/L for uranium-233/234 and 600 pCi/L for uranium-235 and uranium-238). Uranium and uranium isotopes were detected in the other 2009 surface water samples at concentrations similar to those detected in previous years. Because uranium occurs naturally in rocks and soil, some or all of the uranium detected in these samples may be due to naturally-occurring uranium.

6.4.13 Water Supply Monitoring

Routine monitoring of residential drinking water sources is completed at PORTS in accordance with the requirements of Section VIII of the September 1989 Consent Decree between the State of Ohio and DOE and the *Integrated Groundwater Monitoring Plan*.

The purpose of the program is to determine whether residential drinking water sources have been adversely affected by plant operations. Although this program may provide an indication of contaminant transport off site, it should not be interpreted as an extension of the on-site groundwater monitoring program, which bears the responsibility for detection of contaminants and determining the rate and extent of contaminant movement. Data from this program will not be used in environmental investigations due to the lack of knowledge of how residential wells were constructed and due to the presence of various types of pumps (which may not be ideal equipment for sampling).

One residential well was added to the monitoring program in 2009 (RES-017); therefore, six residential drinking water sources participated in the program in 2009 (see Figure 6.13). Wells are sampled semiannually with samples analyzed for the parameters listed in Table 6.1. The PORTS water supply (RES-012 on Figure 6.13) is also sampled as part of this program. Sampling locations may be added or deleted if requested by a resident and as program requirements dictate. Typically, sampling locations are deleted when a resident obtains a public water supply.

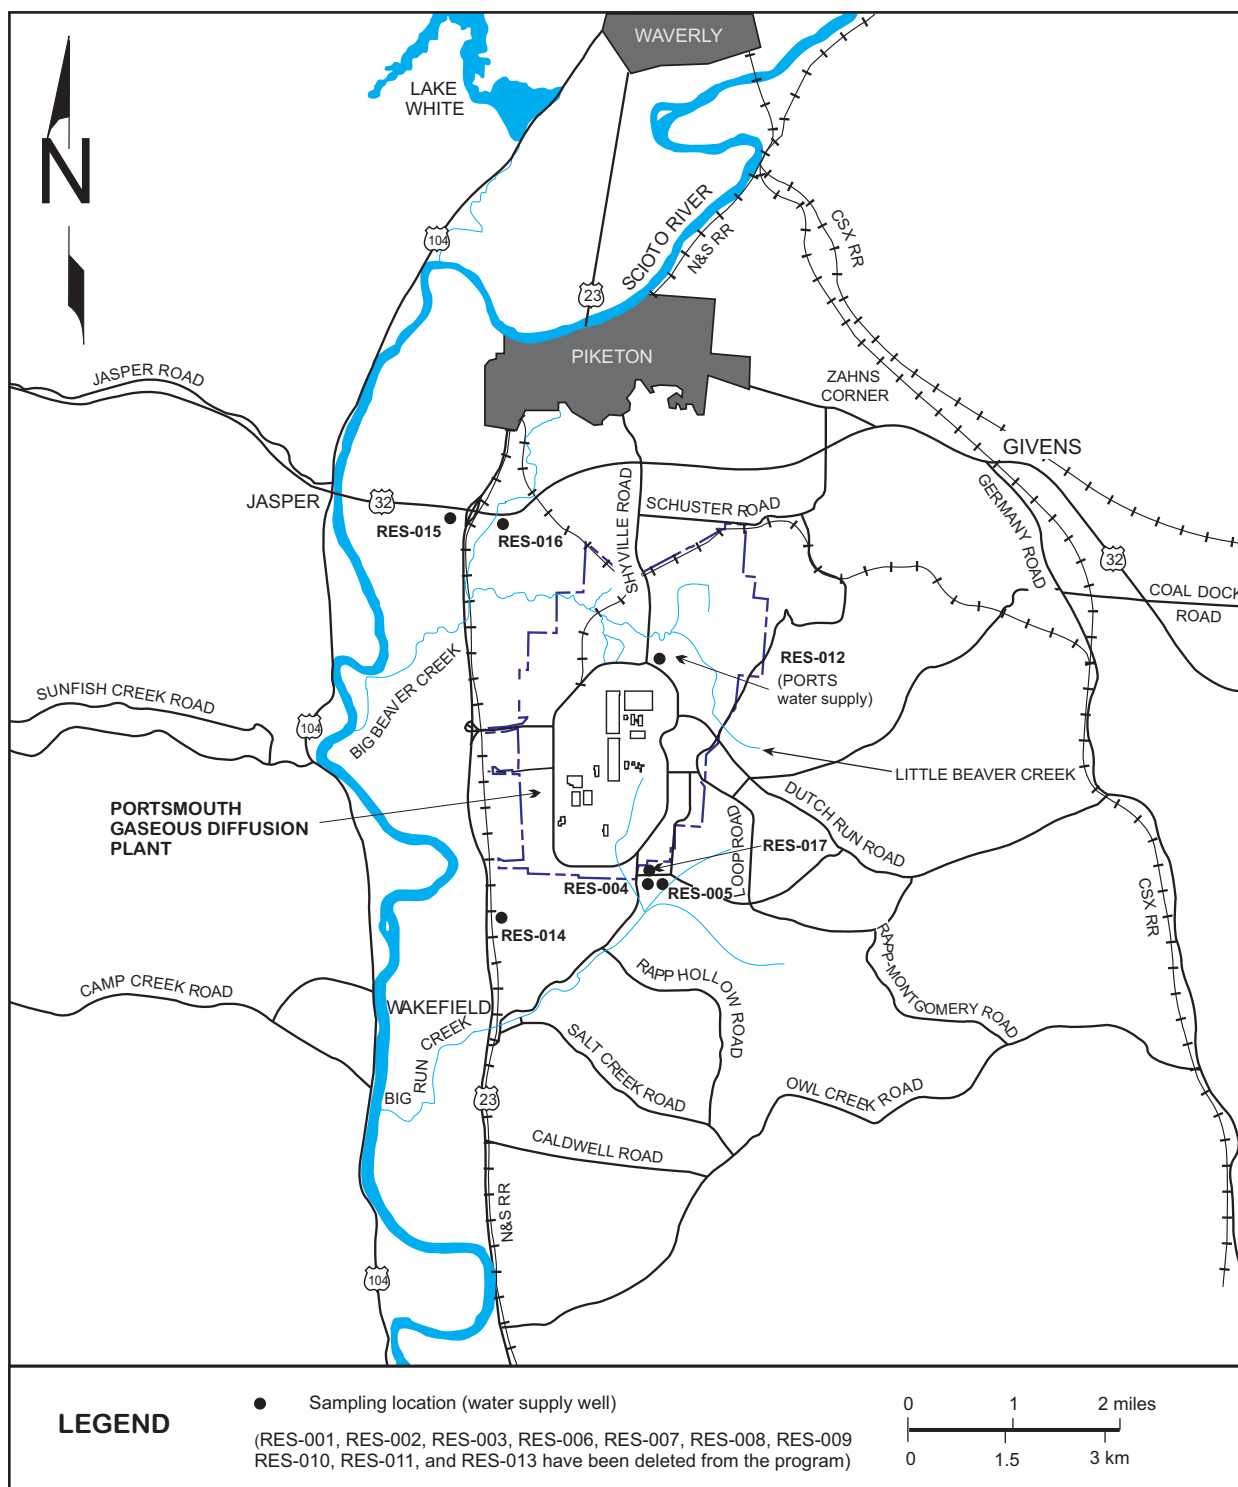


Figure 6.13. Water supply monitoring locations.

Two samples (a regular and duplicate sample) were collected from the new residential sampling location (RES-017) during each sampling event in 2009. In the second quarter, trichloroethene was detected at estimated concentrations of 0.16 and 0.23 µg/L in the regular and duplicate samples, respectively. In the third quarter, trichloroethene was detected at estimated concentrations of 0.48 and 0.51 µg/L, respectively. These detections are less than the drinking water standard for trichloroethene (5 µg/L). No other volatile organic compounds were detected in the samples. Big Run Creek is located between RES-017 and the affected water-bearing formation (i.e., Gallia groundwater) located in the southern portion of the plant site west of Big Run Creek. The Gallia groundwater drains into Big Run Creek.

No other volatile organic compounds (other than sample contaminants acetone and methylene chloride) were detected in the other residential water supply samples collected during 2009. Trihalomethanes (bromodichloromethane, dibromochloromethane, and chloroform) were detected in the first quarter sample collected from the PORTS water supply. These compounds are common residuals in treated drinking water.

Metals detected in the water supply samples were within naturally-occurring concentrations found in the area. No transuranics (americium-241, neptunium-237, plutonium-238, and plutonium-239/240) or technetium-99 were detected in any of the water supply samples collected in 2009. Low levels of uranium and uranium isotopes detected in some of the wells are consistent with naturally-occurring concentrations found in groundwater in the area.

6.5 DOE ORDER MONITORING PROGRAMS

The surveillance monitoring program at DOE PORTS consists of exit pathway monitoring. Exit pathway monitoring assesses the effect of the facility on off-site surface water and groundwater quality.

6.5.1 Exit Pathway Monitoring

Selected locations on local streams and drainage channels near the PORTS boundary are sampling points of the exit pathway monitoring program because surface water from PORTS NPDES outfalls and groundwater discharge to these surface waters. Monitoring wells near the PORTS boundary are also used in the exit pathway monitoring program. Figure 6.14 shows the sampling locations for exit pathway monitoring and Table 6.1 lists the analytical parameters.

Surface water sampling points on Big Run Creek (BRC-SW02), Little Beaver Creek (LBC-SW04), Southwestern Drainage Ditch (UND-SW02), and Western Drainage Ditch (WDD-SW03) are part of the exit pathway monitoring program. Trihalomethanes (bromodichloromethane, bromoform, chloroform, and dibromochloromethane), which are common residuals in chlorinated drinking water, were detected in samples collected from the Western Drainage Ditch and Big Run Creek at concentrations well below Ohio EPA non-drinking water quality criteria for trihalomethanes for the protection of human health in the Ohio River drainage basin (see Section 6.4.12.1).

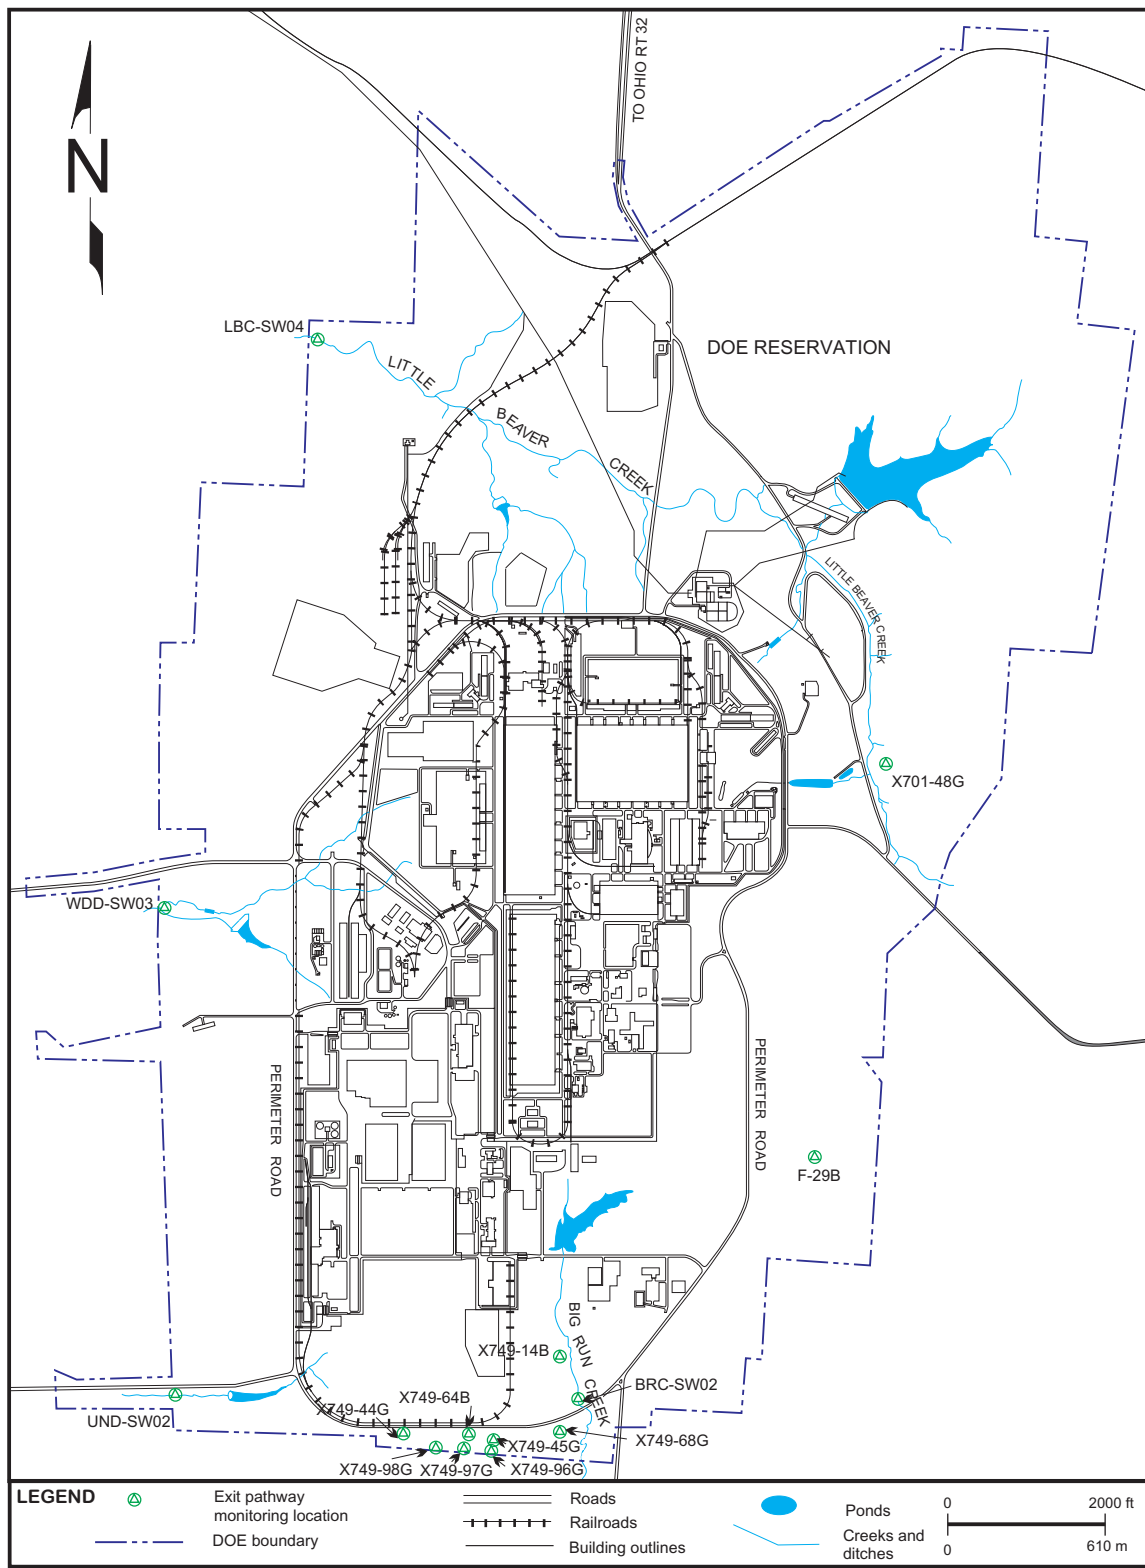


Figure 6.14. Exit pathway monitoring locations.

In 2009, concentrations of volatile organic compounds, including trichloroethene, decreased in three on-site exit pathway groundwater monitoring wells (X749-44G, X749-45G, and X749-97G) that monitor the X-749 South Barrier Wall Area and are part of the monitoring program for the X-749/X-120/PK Landfill monitoring area (see Figure 6.2 and Section 6.4.1.3). Concentrations of trichloroethene detected in the samples from these on-site wells were 5.4 µg/L in well X749-44G, 1.4 µg/L in well X749-45G, and 0.42 µg/L in well X749-97G. The concentration of trichloroethene detected in well X749-44G exceeds the EPA drinking water standard for trichloroethene (5 µg/L); however, the monitoring well is located within the PORTS boundary.

In 2009, no transuranics or technetium-99 were detected in exit pathway monitoring wells sampled for radionuclides during 2009 or in the surface water sampling locations that are part of the exit pathway monitoring program.

6.6 GROUNDWATER TREATMENT FACILITIES

In 2009, a combined total of approximately 33.4 million gallons of water were treated at the X-622, X-623, X-624, and X-627 Groundwater Treatment Facilities. Approximately 64 gallons of trichloroethene were removed from the water. All processed water is discharged through NPDES outfalls before exiting PORTS. Facility information is summarized in Table 6.2.

Table 6.2. Summary of trichloroethene removed by DOE PORTS groundwater treatment facilities in 2009

Facility	Gallons of water treated	Gallons of TCE removed
X-622	20,227,200	3
X-623	2,258,300	26
X-624	3,181,800	13
X-627	7,768,200	22

6.6.1 X-622 Groundwater Treatment Facility

The X-622 Groundwater Treatment Facility consists of an air stripper with aqueous-phase activated carbon filtration. This facility processes groundwater from the following systems in Quadrant I:

- Groundwater collection system with associated sump (X749-WPW) and extraction wells X749-EW05G and X749-EW06G on the southwest boundary of the X-749 Landfill;
- Groundwater extraction wells X749-EW01G, X749-EW02G, X749-EW03G, and X749-EW04G installed in 2007 in the X-749 South Barrier Wall area;
- Groundwater collection system and associated sumps (PK-PL6 and PK-PL6A) on the eastern boundary of the PK Landfill; and
- Fifteen extraction wells located in the Quadrant I Groundwater Investigative Area.

The facility processed approximately 20.2 million gallons of groundwater during 2009, thereby removing approximately 3 gallons of trichloroethene from the water. Treated water from the facility discharges through LPP NPDES Outfall 608, which flows to the USEC Sewage Treatment Plant. No NPDES permit limitations were exceeded at Outfall 608 in 2009.

6.6.2 X-623 Groundwater Treatment Facility

The X-623 Groundwater Treatment Facility consists of an air stripper with offgas activated carbon filtration and aqueous-phase activated carbon filtration. The X-623 Groundwater Treatment Facility treats trichloroethene-contaminated groundwater from a sump in the bottom of the X-701B Holding Pond and three groundwater extraction wells (X623-EW01G, X623-EW02G, and X623-EW03G) east of the holding pond. In 2009, water collected during excavation activities associated with the X-701B soil remediation project was also treated at the X-623 Groundwater Treatment Facility.

The facility treated approximately 2.3 million gallons of water during 2009, thereby removing approximately 26 gallons of trichloroethene from the water. Treated water from the facility discharges through LPP NPDES Outfall 610, which flows to the USEC Sewage Treatment Plant. No NPDES permit limitations were exceeded at Outfall 610 in 2009.

6.6.3 X-624 Groundwater Treatment Facility

At the X-624 Groundwater Treatment Facility, groundwater is treated via an air stripper with offgas activated carbon filtration and aqueous-phase activated carbon filtration. This facility processes trichloroethene-contaminated groundwater from the X-701B groundwater plume, specifically the X-237 Groundwater Collection System, which consists of north-south and east-west collection trenches and sumps #1 and #2.

The X-624 Groundwater Treatment Facility treated approximately 3.2 million gallons of water in 2009, thereby removing approximately 13 gallons of trichloroethene from the water. Treated water from the facility discharges through LPP NPDES Outfall 015, which discharges to Little Beaver Creek. No NPDES permit limitations were exceeded at Outfall 015 in 2009.

6.6.4 X-627 Groundwater Treatment Facility

The X-627 Groundwater Treatment Facility consists of an air stripper with offgas activated carbon filtration and aqueous phase activated carbon filtration. The X-700 and X-705 buildings are located above the Quadrant II Groundwater Investigative Area plume, and contaminated groundwater is extracted from sumps located in the basement of each building.

Approximately 7.8 million gallons of groundwater were processed during 2009, thereby removing 22 gallons of trichloroethene from the water. Treated water from the facility discharges through LPP NPDES Outfall 611, which flows to the USEC Sewage Treatment Plant. No NPDES permit limitations were exceeded at Outfall 611 in 2009.

This page intentionally left blank.